

REVIEW ARTICLE



A review of the potential impacts of climate change on the safety and performance of bridges

Amro Nasr^a, I. Björnsson^a, D. Honfi^b, O. Larsson Ivanov^a, J. Johansson^c and E. Kjellström^d

^aDivision of Structural Engineering, Lund University, Lund, Sweden; ^bDepartment of Safety, RISE Research Institutes of Sweden, Gothenburg, Sweden; ^cDivision of Risk Management and Societal Safety, Lund University, Lund, Sweden; ^dRosby Centre, Swedish Meteorological and Hydrological Institute, Norrköping, Sweden

ABSTRACT

An overabundance of evidence, both observational and from model projections, indicate that changes to the climate system are taking place at unprecedented rates. Although the magnitudes of these changes involve large uncertainties, the fact that our climate is changing is unequivocal. To ensure an unimpaired functionality of our societies, it is therefore of crucial importance to study the potential climate change impacts on infrastructure. Taking into account that bridges have a considerably long service life, it is of direct relevance to ascertain their reliable performance against climate change risks. This paper synthesizes the findings of over 190 research articles to identify the potential risks climate change may pose on bridges. Over 30 potential risks, supported by pertinent previous bridge damage (or failure) cases, are identified, categorized, and linked to the projected future climate changes. The identified risks can be used as a basis for future risk prioritization by bridge managers.

ARTICLE HISTORY

Received 24 December 2018
Accepted 7 March 2019

KEYWORDS

Climate change; risk; bridges; infrastructure safety

1. Introduction

The more we proceed toward the future, the clearer it becomes that significant changes to our climate are taking place. Not only is it being observed that our climate is changing in an unprecedented pace in comparison to the preindustrial climate but also, further changes, potentially with even faster rates than the ones observed so far, are consistently being projected by Global Circulation Models (GCMs). Such changes may induce unforeseen, or increase currently existing, impacts on several sectors including, but not limited to, the different elements of the infrastructure. The potentially severe climate impacts on infrastructure necessitate timely and unfaltering measures, not only to mitigate Greenhouse gas (GHG) emissions by introducing international environmental agreements, e.g., the 2015 Paris agreement (United Nations Framework Convention on Climate Change [UNFCCC], 2015), but also in terms of adapting existing infrastructure and increasing its resilience against such impacts. In addition to adaptation, reforming maintenance and inspection manuals in order to accommodate the effects of climate change is also relevant for existing infrastructure. With regards to infrastructure to be built in the future, a revision of the design codes to account for the effects of climate change is essential.

The imperativeness for studying the effects of climate change on infrastructure is also highlighted by several

other factors. For instance, any proposed alterations to the currently accepted engineering practice must be strongly supported by research results, well-established, and critically scrutinized by the engineering community prior to being considered for adoption in codes of practice. Considering how long this process may be, the urgency for addressing climate change effects can be easily comprehended. As an example, Meyer (2008) refers to the prolonged process of implementing the Superpave program in the pavement design standards. Despite an initial decision to introduce the program in the standards in the early 1990s, it was only in 2005, i.e., approximately 15 years after the initial decision, that the standards were actually updated to include the amendments. Two other stark examples are mentioned in Borges (1997). Although the principle ideas were articulately introduced in a 1926 thesis titled ‘The Safety of Constructional Works and its Design According to Limit States Instead of Permissible Stresses’ by Mayer (1926), it was not until the mid-1940s that limit state methods first found their way into codes of practice of the former Soviet Union. The time needed to introduce these methods into other design standards was even longer. Moreover, the partial safety factors design method currently used in most codes of practice was not implemented until 1963 in the CEB recommendations (Comité Européen du Béton, 1963), even though the foundation for this method was already laid in the late 1940s in the

CONTACT Amro Nasr  amro.nasr@kstr.lth.se

This article has been republished with minor changes. These changes do not impact the academic content of the article.

© 2019 The Author(s). Published by Informa UK Limited, trading as Taylor & Francis Group.

This is an Open Access article distributed under the terms of the Creative Commons Attribution-NonCommercial-NoDerivatives License (<http://creativecommons.org/licenses/by-nc-nd/4.0/>), which permits non-commercial re-use, distribution, and reproduction in any medium, provided the original work is properly cited, and is not altered, transformed, or built upon in any way.

pioneering work of Freudenthal (1945) and Torroja and Paez (1949).

Another argument for the urgency of addressing climate change risks to Infrastructure is presented in Hill (2012). Hill (2012) observes that major protection projects, e.g., storm surge barriers, often require a considerable period of lead time for gaining public support, securing the necessary funding for the project, making assessments, preparing designs, and obtaining permits, before their construction is even initiated. Two examples of extended lead time are the MOSE project in Venice, Italy, and the Maeslant storm surge barrier in Rotterdam, the Netherlands. Although the former was triggered by the 1966 flood in Venice, close to 50 years ago, it is as of the time this research is conducted not yet operational. This project had a lead time of 37 years, i.e., it started in 2003. The latter project was launched by the Dutch government in the wake of the 1953 Rotterdam flood as an essential element of the Delta Works project. The construction of the barrier, which has been fully operational since 1997, did not, however, start until 1989; that is, it had a lead time of 36 years.

Despite all these considerations, to date, only few studies have addressed the potential impacts of climate change on infrastructure (e.g., Kumar & Imam, 2013; Meyer, 2008; Mondoro et al., 2018; Schwartz, 2010). The purpose of this paper is to address this gap in scientific knowledge by investigating the potential risks climate change may induce, or increase, on bridges. Taking into account the fact that bridges have a considerably long service life, sometimes surpassing 100 years, it is of direct relevance to ascertain their reliable performance against climate-change risks. Furthermore, considering that climate change is projected to increase the frequency and intensity of some extreme events (e.g., floods) the importance of having resilient bridges that are able to maintain at least a minimum level of their functionality during these events and quickly recover afterward is highlighted. This puts bridges at the forefront of climate-change relevant infrastructure. The paper synthesizes a broad list of the potential risks climate change may impose on bridges, independent of their likelihood or the consequences of their occurrence. Identifying all the rationally possible risks, irrespective of how low/impact or improbable they may seem, is vital to avoid leaving out critical risks that may appear trivial at first sight. The importance of developing an as complete as possible list of the potential risks at this stage of risk analysis, i.e., the risk identification stage, has been highlighted by several researchers; see, e.g., Chapman (2001), Kaplan et al. (2001), and Raspotnig and Opdahl (2013). Ruling out the uncritical and prioritizing the more serious risks will be addressed in further work. Although bridges are the main focus of the current

paper, many of the identified risks can affect other infrastructure elements as well. This paper starts by providing an overview of the projected changes in the future climate. Next, the method used for identifying the potential impacts of these changes to bridges is outlined. The identified risks are then presented followed by a section highlighting some of the ways these risks may interact. Lastly, a section dedicated for discussing the implications of this study and further research directions is introduced.

2. Emission scenarios and the relevant projected climate changes

Numerous climate change scenarios have been defined in literature. However, in its fifth, and most recent, Assessment Report (AR5), the Intergovernmental Panel on Climate Change (IPCC) refers to four different scenarios, RCP 2.6 (Representative Concentration Pathway 2.6), RCP 4.5, RCP 6.0, and RCP 8.5 (Intergovernmental Panel on Climate Change [IPCC], 2013; and IPCC, 2014). The number identifying each scenario represents the approximate Radiative Forcing (RF), in W/m^2 , either at the year 2100, or at stabilization afterward, in comparison to the year 1750; representing the preindustrial levels. Radiative forcing is a measure of the change in energy flux per surface area. Surface warming is a result of positive radiative forcing while negative radiative forcing results in surface cooling (IPCC, 2013).

The RCP 2.6 is a relatively optimistic scenario in which stringent mitigation policies would be implemented to limit GHG emissions. This scenario is characterized by a peak of 3 W/m^2 in RF that occurs before 2100 followed by a decline to a value of 2.6 W/m^2 at 2100 (IPCC, 2014). A rapid decline in oil consumption, a world population of approximately 9 billion by the year 2100, and a significant increase in the use of bio-energy are among the assumptions associated with this scenario (Van Vuuren et al., 2011). Under this scenario, a warming of 0.3°C to 1.7°C by the end of the century is projected. At the other extreme, the RCP 8.5, a scenario of comparatively high greenhouse gas emissions, results in a RF of approximately 8.5 W/m^2 by 2100 (Van Vuuren et al., 2011). This is a highly energy-intensive scenario which assumes rapid population growth, with a population close to 12 billion by the year 2100, a modest income growth, and a low rate of technological development (Riahi et al., 2011; Van Vuuren et al., 2011). The IPCC special report on global warming of 1.5°C (IPCC, 2018) maintains that even pathways reflecting the current nationally stated mitigation ambitions, i.e., in the Paris agreement, would not limit global warming to 1.5°C . According to Rogelj et al. (2016), such pathways imply a median warming of 2.6°C to 3.1°C by 2100. Regardless of which scenario the future unfolds (i.e., even in a 1.5°C

world), the future climate will be significantly different from that of today (IPCC, 2018).

Looking at the range of these scenarios and the many assumptions associated with them, the large degree of uncertainty involved in projecting the future climate becomes easily appreciable, not to mention the uncertainty added by the GCMs themselves. Therefore, the selected scenario strongly influences the magnitude of climate change and its different parameters or phenomena. For instance, Figure 1 illustrates the projections of the global average surface temperature for the four scenarios (IPCC, 2013). It should be noted, however, that there exists an agreement between the projections of the four scenarios on the trend of change of many climate parameters and phenomena. The climate changes relevant to this study are presented in Table 1.

In addition to the changes in Table 1, so-called compound events may also be influenced by climate change. Compound events are defined as instances where two or more events that are not necessarily themselves extreme happen simultaneously or shortly after one another leading to an extreme impact (IPCC, 2012). In January 2012, a near-flooding event took place in the Netherlands as a result of such compound events. An intense precipitation event over the Rhine catchment area followed by a storm surge resulted in this high-impact event (Van Den Hurk et al., 2015). However, changes in the patterns of such compound events due to climate change are generally supported by less robust evidence.

3. Method

In this work, close to 200 research articles were reviewed to construct a broad list of the potential impacts of climate change on bridges. The presented impacts were identified in three ways. Firstly, some of the presented risks were cited in previous literature as potential climate change risks, see, e.g., Hultén et al. (2007); Kumar and Imam (2013); Meyer (2008); Schwartz (2010); and Stewart et al. (2011). Other risks

were identified by reviewing documented cases of bridge malfunction, damage, or failure and investigating possible connections between these incidents and the climatic parameters that are projected to change in the future. Lastly, some of the risks were identified considering the climatic parameters projected to change and attempting to elaborate scenarios in which they can affect the performance and/or safety of bridges. The last two methods for identifying climate change impacts are analogous to the two methods of risk identification described in Kaplan (1997); that is, identifying possible end states and finding their possible causes (method 2) and identifying initiating events (a change in a climatic parameter in our case) and finding their possible consequences. The method used for identifying the presented risks is shown in Figure 2.

4. Climate-change imposed risks on bridges

In this section, a review of the potential risks on bridges as a result of climate change is presented. Although bridges are the main focus in this study, most of the mentioned risks can be extended to other types of infrastructure assets and systems. A total of 31 risks are identified and discussed. The different risks are grouped into seven main categories as follows:

- Durability (risk group D),
- Serviceability (risk group S),
- Geotechnical (risk group G),
- Increased demand (risk group I),
- Accidental loads (risk group A),
- Extreme natural events (risk group E), and
- Operational risks (risk group O).

Although most of the identified risks are a direct impact of climate change on bridges, a few only may affect bridges indirectly, i.e., they involve other external factors beside the climate and the bridge system; for example, risk group A and risk O3. In addition, most of the

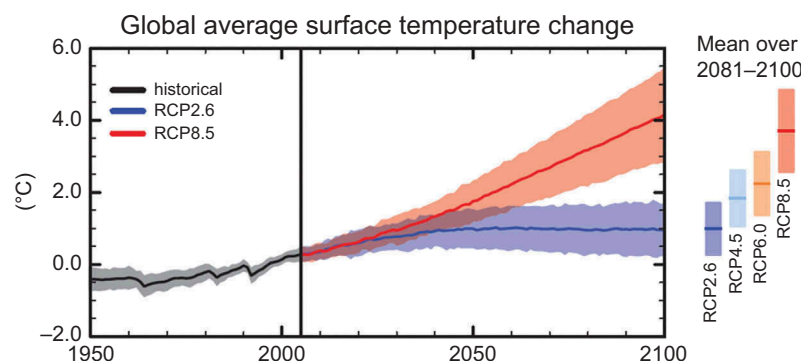


Figure 1. Changes in the global average surface temperature relative to 1986–2005 for the different emission scenarios (IPCC, 2013).

Table 1. Projected future trends of different climate parameters/phenomena.

Climate parameter/phenomenon	Trend of change	Reference(s)
Temperature	- Higher global mean ($T \uparrow$) - Higher seasonal contrast in some locations ($T \leftrightarrow$)	IPCC (2013) Imada et al. (2017)
Heatwaves	- Increased intensity and/or frequency ($HW \uparrow$)	The World Bank (2012)
Solar radiation	- Possible increase in some regions ($SR \uparrow$)	McKenzie et al. (2011) Ohunakin, Adaramola, Oyewola, Matthew, & Fagbenle (2015)
Precipitation	- Increase in intensity and/or frequency in some regions ($P \uparrow$) - Decrease in intensity and/or frequency in other regions ($P \downarrow$) - Increase in contrast between wet and dry regions and seasons ($P \leftrightarrow$)	IPCC (2013)
Snowfall	- Increase in intensity and/or frequency in some regions ($SF \uparrow$)	IPCC (2013)
Relative humidity	- Decrease in relative humidity over land for most regions. ($RH \downarrow$) - Increase in relative humidity over land for some regions under some scenarios ($RH \uparrow$)	IPCC (2013)
Wind	- Increase in speed in some regions during some seasons ($W \uparrow$) - A decrease in speed during other seasons ($W \downarrow$) - Increase in intensity and/or frequency of extreme wind events ($W \uparrow$)	IPCC (2013) Cradden, Harrison, & Chick (2006) Bloom, Kotroni, & Lagouvardos (2008)
Soil salinity	- Increase in some regions ($SS \uparrow$)	Dasgupta, Hossain, Huq, & Wheeler (2015)
Storms	- Increase in intensity and/or frequency in some regions ($S \uparrow$)	IPCC (2013)
Sea level	- Sea level rise (SLR)	IPCC (2013)
Carbon concentrations in the atmosphere and oceans	- An increase in carbon concentrations in the atmosphere and in oceans ($CC \uparrow$)	IPCC (2013)
Ocean temperature	- A rise in ocean temperature ($OT \uparrow$)	IPCC (2013)
Run-off	- Higher annual mean run-off in some regions ($RO \uparrow$)	IPCC (2013)
Near surface permafrost area	- Decrease in near surface permafrost area ($PF \downarrow$)	IPCC (Intergovernmental Panel on Climate Change) (2013)
Ocean surface pH	- Decrease in global ocean surface pH ($PH \downarrow$)	IPCC (2013)
Fog	- Increase in the in-cloud liquid water content of marine fogs ($F \uparrow$)	Kawai, Koshiro, Endo, Arakawa, & Hagihara (2016)
Water level in rivers	- Increased water level fluctuation for some rivers ($WL \leftrightarrow$)	Úbeda et al. (2013)

discussed risks can, in the worst case, affect the safety of bridges, however, some only concern the serviceability (e.g., risk S1 and risk I5) or operation (e.g., risk group O) of bridges.

4.1. Risk group D: durability risks

4.1.1. Risk D1: accelerated degradation of superstructure

One very relevant risk that climate change poses to existing bridges, and infrastructure in general, is an increased rate of material deterioration and degradation; see, e.g., Kumar and Imam (2013). Projected climate change like higher temperatures, increased precipitation in some regions, increase in relative humidity in some regions under some scenarios, and higher carbon concentrations in the atmosphere all promote accelerated deterioration. This observation is supported by a number of studies (e.g., Bastidas-Arteaga et al., 2013; Bastidas-Arteaga & Stewart, 2015; Chaves et al., 2016; Köliö et al., 2014; Stewart et al., 2011; Wang et al., 2012). For instance, a recent study by Stewart et al. (2011) quantitatively assessed the risk of corrosion initiation and damage to concrete infrastructure under future climatic conditions

in the cities of Sydney and Darwin, Australia. One of the conclusions of this study was that over a 400% increase in the risk of carbonation-induced damage is presumable by the year 2100 for some regions in Australia. Another study by Köliö et al. (2014) considered the effects of the higher carbon concentration and higher precipitation on corrosion initiation and the duration of active corrosion (after which the structure is assumed to have reached a predefined limit state) for concrete buildings in Finland. The results of this study showed that both corrosion initiation and the duration of active corrosion were likely to be adversely impacted by climate change. For instance, it was indicated that in Lapland a change in the duration of active corrosion from 37.5 years, for the 1980–2009 climate, to only 19.7 years is probable for the projected 2100 climate. However, as indicated in Bastidas-Arteaga and Stewart (2015), the potential drop in relative humidity, which is projected for many regions, can have some positive effects on the deterioration rate of concrete structures. It is reasonable to assume that this risk is also relevant to steel, and other metallic, elements as well. Examples of previous bridge failures that were, at least partly, attributed to corrosion are the Silver Bridge, Ohio, USA in 1967 and the I-95 over the Mianus River

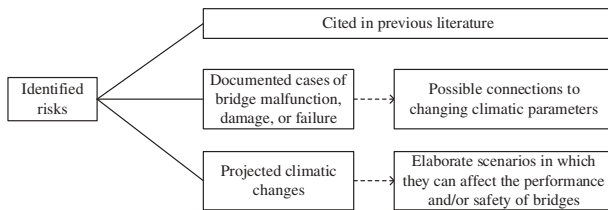


Figure 2. Method of risk identification.

Bridge, Connecticut, USA in 1983 (Cook et al., 2015; Lichtenstein, 1993).

The possible increase in solar radiation in some places raises concern for another degradation type risk, namely, photodegradation; see, e.g., Andrady et al. (2003), Chin et al. (1997), and Kumar and Imam (2013). According to Andrady et al. (2003), the increase in the UV-B component of solar radiation significantly affects light-induced damage of synthetic and naturally occurring materials. In this study, it is pointed out that plastics, rubber, and timber are especially sensitive to this risk. Composite materials are also prone to degradation initiated by solar radiation (Chin et al., 1997; Kumar & Imam, 2013).

Biodegradation of materials may also be influenced by the projected future climate changes (e.g., Kumar & Imam, 2013; Moncmanová, 2007). The growth of organisms causing biodegradation is supported by the higher temperatures, higher relative humidity in some regions under some scenarios, and higher precipitation projected in the future. Timber is especially susceptible to this type of deterioration (e.g., Shupe et al., 2008). Furthermore, Moncmanová (2007) notes that higher atmospheric carbon concentrations may enhance the activity of some bacteria types that obtain carbon from carbon dioxide and produce energy from light. The author of the study points out that although concrete has a pH value of 11–12.5 when it is freshly poured, which prevents the growth of bacteria, the pH of concrete drops with time to reach a value of 9–9.5 which offers a more favorable environment for bacterial growth. It can be argued that the increased abundance of atmospheric carbon, characteristic of the future climate, may accelerate this pH drop subsequently leading to faster biodegradation. Similar to biodegradation, it has also been noted that degradation of timber structures resulting from insect attacks may increase due to future climatic conditions, e.g., shorter and warmer winters that provide less harsh environments for these insects (Schwartz, 2010).

Further relevant risks include faster deterioration of concrete or steel structures as a result of either a more frequent application of de-icing salt (Cady & Weyers, 1984; Darwin et al., 2008) in regions where snowfall is projected to increase or a possible increase in freeze and

thaw cycles (Meyer & Weigel, 2011; Transportation Research Board [TRB], 2008). Regarding the latter risk, it can be noted that Pakkala et al. (2015) did not find a significant increase in the number of freeze and thaw cycles in southern Finland due to climate change. However, trends may be different in other regions (Meyer & Weigel, 2011; TRB, 2008).

4.1.2. Risk D2: accelerated degradation of substructure

Similar to the risk of accelerated degradation of superstructure elements, several aspects of the future climate can result in a more aggressive environment to bridge foundations. The projected higher future temperatures, change in relative humidity, lower ocean pH value (ocean acidification), higher soil salinity in some places (salinity intrusion), and higher carbon concentrations in ocean and atmosphere, all potentially contribute to a more corrosive environment. The extent of this problem is also dependent on the Ground Water Table (GWT) level. In Mallick et al. (1989), e.g., it is stated that chemicals (e.g., sulfates and chlorides) in their dry state do not significantly increase the foundation deterioration rate. However, when these chemicals are present in the form of a solution in the groundwater, a much faster deterioration is expected. As a result, the projected higher precipitation in some regions, which may lead to a higher GWT, further aggravates the risk of foundation deterioration.

On the other hand, the potential GWT drop, possibly occurring in regions of lower precipitation and/or increasing evaporation, may come with its own negative impacts on the foundation material (Toll et al., 2012). Wooden piles under the GWT are not exposed to aerobic conditions and are therefore not susceptible to biodegradation. As soon as the GWT lowers, the part of the pile above water becomes exposed to aerobic conditions and biodegradation can start (Klaassen, 2015; Toll et al., 2012). This risk is also relevant to steel piles; see, e.g., Cheung et al. (1994).

It can also be mentioned that taking into account that the corrosion rate is highest in the splash and low water zones, substructures supporting bridges in marine environments are often provided with additional corrosion protection over the length exposed to these zones; see, e.g., Corus Construction & Industrial (2005). This measure is taken to counteract the accelerated corrosion in these zones and reach the desired service life for which the bridge is designed. However, the projected Sea Level Rise (SLR) in the future implies that the length over which the substructure is exposed to the splash and low water zones will possibly shift upwards exposing unprotected portions to higher corrosion rates.

4.2. Risk group S: serviceability risks

4.2.1. Risk S1: heat-induced damage to pavements and railways

It has been argued that the projected temperature rise and more frequent heatwaves may have significant impacts on both pavements and railways (Schwartz, 2010). Meyer (2008) references the Chicago 1995 heat-wave event and the damage associated with it as an example. As reported in Changnon et al. (1996) the heat-induced movement of rails was a main factor contributing to a train accident during the Chicago 1995 heatwave. Gudipudi et al. (2017) studied the impact of the projected future temperature on the structural performance of pavement in the United States. The results of their study indicate that earlier pavement failure and/or greater distress are likely under future climate conditions. Another study by Anyala et al. (2011) indicates that the expected cumulative rut depth in pavements may increase threefold by 2050 due to the projected temperature increases. The projected increase in precipitation in some regions may also affect this risk. In a case study for the UK, Hudson (2004) indicated that an increase of as much as 60 times in the annual road maintenance costs by the 2080s is possible due to climate change. For further reading on the possible effects of climate change on highway pavements, the reader is referred to Jeong et al. (2017), Kumlai et al. (2017), Mallick et al. (2018), Qiao (2015), and Willway et al. (2008).

4.2.2. Risk S2: risk of increased long-term deformations

This subsection addresses the risk of long-term deformations, i.e., creep, which is not to be confused with the risk of increased demand on deformation capacity addressed under risk I4. It is well established in the literature that one of the factors governing long-term deformations of concrete, i.e., creep, is the ambient environmental conditions. The projected lower relative humidity over land, along with higher temperatures are identified in the literature as resulting in a higher creep rate for concrete; see, e.g., Bažant and Panula (1978), England and Ross (1962), Geymayer (1972), Nasser and Neville (1967), Razak (1986), and Vandamme et al. (2013). In a recent study by Bažant et al. (2011) it is noted that creep problems are of considerable significance for bridges. The authors of this study demonstrate that, although mainly a serviceability problem, creep may lead to serious consequences. As an example, the authors cited the 1996 collapse of the Koror-Babeldaob Bridge in Palau (a segmentally erected prestressed box

girder bridge with a world-record span of 241 m) which is said to have occurred as a result of excessive creep. The failure of this bridge draws attention to yet another potential risk; namely, the possible loss of prestressing force (risk I8). Measurements revealed that this bridge had on average a 50% loss of prestress due to excessive deformations (Bažant et al., 2011). In this study, it is reported that 56 other bridges were identified to exhibit similar excessive creep deformations and it is stated that many more likely exist.

Timber is also susceptible to creep problems and, similar to concrete, the higher future temperature is likely to contribute to accelerated creep. However, moisture content also significantly influences the creep behavior in timber. A higher moisture content leads to higher creep rates and vice versa; see, e.g., Carll and Wiedenhoef (2009). Noting that the moisture content increases with lower temperatures and higher relative humidity (e.g., Carll & Wiedenhoef, 2009), the future climatic conditions may result in increased or decreased timber moisture content depending on the location. Another behavior that distinguishes timber from other materials is related to the mechano-sorptive effect; see, e.g., Holzer et al. (1989), and Mårtensson (1994). Timber displays considerably higher deformations under the same stress level if exposed to more frequent and/or higher magnitude moisture content cycling. Therefore, a more frequent and/or higher magnitude of change in relative humidity will increase the risk of excessive deformations, possibly leading to serviceability problems under loads that are significantly smaller than the original design load (Honfi, 2013). The higher seasonal contrast in precipitation for some regions, projected in AR5 of the IPCC, may plausibly imply a higher contrast in relative humidity as well. Similar to the loss of prestress in prestressed concrete elements, stress-laminated timber bridge decks, which are mainly supported by prestressing forces connecting the timber laminations, are also susceptible to loss of pre-stressing forces due to changes in temperature and timber moisture content (Bell, 2008).

4.3. Risk group G: geotechnical risks

4.3.1. Risk G1: higher scour rates

Scour problems have been repeatedly demonstrated to be one of the most common initiating causes for bridges failure. Cook et al. (2015) surveyed bridge failures from the New York State Department of Transportation (NYSDOT) database for the period 1987–2011 and

found scour to be one of the most common causes of failure. Many other studies reaffirm this conclusion; see, e.g., Arneson et al. (2012), Briaud et al. (2007), Briaud et al. (2014), Flint et al. (2017), Kattell and Eriksson (1998), Stein, Young, Trend, & Pearson (1999), Stein and Sedmera (2006), and Taricksa (2014). Several empirical equations for predicting scour depths exist; see, e.g., Deng and Cai (2010). These empirical equations often link scour depths to the approach water depth, flow velocity, and the water kinematic viscosity; see, e.g., Froehlich (1989), Neil (1964), and Shen et al. (1969). According to these equations, higher scour rates are associated with higher flow depths, higher flow speeds, and lower kinematic viscosity.

Considering climate change, higher future scour rates are likely for a number of reasons (Rail Safety and Standards Board [RSSB], 2003; DoT, 2005; TRB, 2008; Kumar & Imam, 2013). Arnell and Gosling (2013) studied the impacts of climate change on river flow regimes at the global scale. In their study, they concluded that over 47% of the world's land surface is projected to experience significantly higher average annual runoff. As a result, higher flow speeds, resulting in a substantial increase in scour rates, are expected. Another local factor that may lead to higher flow speeds is the additional runoff from the melting permafrost in places where they exist. Furthermore, due to sea level rise and increase in precipitation, higher future flow depths and/or velocities that may lead to faster scour rates are possible at many locations. Moreover, a warmer future climate results in a decrease in the kinematic viscosity of water and therefore the scour risk could be further increased. These factors of the future climate can affect the local scour around bridge piers and abutments as well as the general scour of the river bed at the bridge site. Several recent studies addressed the impact of climate change on this risk; see, e.g., Dikanski et al. (2016), Dikanski et al. (2018), and Kallias and Imam (2016).

4.3.2. Risk G2 and risk G3: higher risk of bridge side-slope failure and higher risk of landslides

Due to their similar failure mechanisms and driving forces, this subsection discusses both the higher risk of bridge side-slope failure and landslides. However, these are presented as two separate risks as they may have totally different consequences. It is well established that one of the main triggering mechanisms of slope failure and landslides is intense rainfall events; see, e.g., Chen et al. (2004). Kristo et al. (2017) studied the effect of variations in rainfall intensity on the slope stability in Singapore and observed a significant reduction, especially in the first half of the century, in the factor of safety of slopes due to the projected more frequent

intense precipitation events. In Hultén et al. (2007) the impact of increased precipitation on the slope failure risk was assessed for two case study areas in Sweden; one in the southwest, the Göta Älv valley, and one in the north, Krokvåg. It was concluded that, for all types of slopes in the studied areas, a reduced safety is to be expected. Several other studies also indicate that climate change will negatively impact slope stability and potentially lead to more frequent landslides (Ciabatta et al., 2016; Komori et al., 2018; Robinson et al., 2017). It should be pointed out, however, that the results of some studies (e.g., Wu et al., 2016) provide contradictory conclusions to the aforementioned risk of increased frequency of landslides as a result of climate change.

There are also other aspects of the projected future climate that may influence the stability of slopes and the occurrence of landslides. For example, the potential death of some vegetation species due to the elevated future temperatures may further jeopardize the stability of slopes. This is due to the loss of the contribution of vegetation to slope stability (Chok et al., 2004; Wu, McKinnell III, & Swanston, 1979). Additionally, changing wind climate and faster water flows, as discussed under risk G1, can result in a faster rate of erosion of side slopes and consequently further increase this risk.

4.3.3. Risk G4: higher risk of foundation settlement

A GWT rise, due to the increase in precipitation, or drop, due to the decrease in precipitation, may result from the projected changes in the future precipitation patterns. As discussed in Toll et al. (2012), both changes in the GWT can heighten a number of settlement-related risks. An increase in the soil effective stresses is a direct outcome of the drop in GWT due to the associated decrease in the pore water pressure. Therefore, higher consolidation settlement, as a result of this increase in effective stresses, is predictable. On the other hand, a rise in the GWT increases the risk of collapse settlement. Some soils are supported by water-sensitive forces between their particles, e.g., suction forces in the pore water or inter-particle cemented bonds. When these soils come in contact with water, which may result from GWT rise, these forces are lost, and the soil structure can no longer be supported by them which leads to settlement of the foundation. GWT rise can also increase the moisture content of clayey soils leading to a decrease in the modulus of deformation which in turn can significantly increase the settlement of clays. Furthermore, the formation of sinkholes for soils in karstic conditions can also be affected by climate change. Caverns are formed when soluble rock formations, e.g., limestone and dolomite,

get dissolved due to groundwater flow. As long as these caverns remain full of water they are provided with a support preventing their collapse. However, when GWT drops these caverns collapse forming sinkholes, which can seriously impact any structure in the region. Considering projected higher contrasts in seasonal precipitation in some regions, and the stronger seasonal fluctuations in GWT it may cause, this risk is of relevance to climate change. Lastly, permafrost melt due to the increase in temperature also increases the risk of settlement for bridges in such regions (Meyer, 2008).

4.3.4. Risk G5: higher risks of rockfalls, debris flows, and snow avalanches

Similar to the risks of slope stability and landslides, higher risks of rockfalls, debris flows, and avalanches can be predicted; see, e.g., Collins and Stock (2016), Harris et al. (2009), and Stoffel et al. (2014). In addition to the mechanisms mentioned for risks G2 and G3, melting permafrost can induce less stable rock slopes and cause debris flows (Stoffel et al., 2014). Furthermore, the higher future temperatures may also trigger rockfalls (Collins & Stock, 2016) and increase the risk of avalanches (Harris et al., 2009). The reader is referred to Gruber et al. (2004), Harris et al. (2009), Stoffel and Huggel (2012), and Stoffel et al. (2014) for further reading on the risk of mass movements due to climate change. A textbook example of a bridge with a severe rockfall risk is the bridge at the Glenwood Canyon, Colorado, USA on the I-70 highway, where large rockfalls happened in 2005; 2010; and 2016. It is worth noting that the 2010 rockfall left the bridge deck punched. Another example is the Chediguan Bridge, China (He et al., 2018). Due to an earthquake-triggered rockfall in May 2008 the bridge was destroyed. The bridge was then rebuilt and reopened for traffic almost one year after the incident. However, on July 2009, only 2 months after being reopened, the bridge was again destroyed due to a rainfall-triggered rockfall. On the other hand, the Ri di Rialp road Bridge in the Swiss Alps, which collapsed during a snow avalanche in 1998, highlights how consequential can the impacts of an avalanche be. Margreth and Ammann (2004) are referred for a further read on the latter incident.

4.3.5. Risk G6: higher risk of soil liquefaction

Soil liquefaction is one of the main mechanisms causing damage to bridges during earthquakes (e.g., Youd, 1993). The failure of the Showa Bridge in the 1964 Niigata earthquake in Japan is often cited as a classical example;

see, e.g., Youd (1993). Several studies (e.g., Nath et al., 2014, 2018; Obermeier, 1996; Yilmaz & Bagci, 2006) show that shallower GWT are associated with higher liquefaction risk during an earthquake. This is explained by the reduction in the effective confining stresses resulting from the higher GWT which creates a more favorable condition for triggering liquefaction (Nath et al., 2018). Noting that a higher GWT is a possible consequence of climate change at some locations, a higher risk of soil liquefaction during earthquakes at seismically active regions is a plausible concern. In addition, some studies (e.g., Ekström et al., 2006; Hampel et al., 2010; McGuire, 2012; Usman, 2016) argue that climate change can increase the frequency of earthquakes themselves, nevertheless, other studies contradict this claim; see, e.g., Hoeppe (2016).

4.3.6. Risk G7: additional loads on piles that may overstress them

The projected future climate changes may result in additional loads on piled foundations (Toll et al., 2012). Toll et al. (2012) gives two possible mechanisms for inducing these additional loads. Firstly, if the soil surrounding a pile settles, see G4, a downdrag force, referred to as negative skin friction, is exerted on the pile due to the friction between its shaft and the surrounding soil. This force can potentially overstress piled foundations and cause failure. Secondly, GWT lowering due to the decrease in precipitation can lead to the loss of buoyancy force and further overstress the piles.

4.3.7. Risk G8: damage due to clay shrinkage and swelling

Shrinkage and swelling of clays during the dry and wet seasons, respectively, has been reported as a common cause of damage to buildings (Crilly, 2001; Sanders & Phillipson, 2003; Toll et al., 2012). For instance, during the 1990s drought years in the UK, over £1.6 billion of economic losses were linked to clay shrink/swell movements. Similar to buildings, bridges are also susceptible to this risk. The projected increase in seasonal contrast in precipitation, as well as the higher future temperatures that lead to additional evapotranspiration, may increase the severity of the drying and wetting cycles leading to more serious shrinkage and swelling damages (Capon & Oakley, 2012; Toll et al., 2012). In support of the effect of climate change on shrink/swell damages, Corti et al. (2009) attributes the observation that shrink/swell damages in France in the period 1989–2002 were double of those in the period 1961–1990 to climate change.

4.4. Risk group I: increased demand risks

4.4.1. Risk I1: higher wave impact on piers and abutments

In the IPCC (2013) report, several factors of the future climate, most importantly the faster winds in some regions, are projected to increase the frequency and height of extreme waves. Considering that wave impact is an important parameter in the design of bridge components, e.g., piers and abutments (Meyer, 2008), this increase in extreme waves can affect the safety of bridges.

4.4.2. Risk I2: higher risk of wind-induced loads

The projected faster future winds in some locations pose a serious threat on our built environment in general and bridges in particular (Meyer, 2008). The effect of wind on bridges is described by a number of mechanisms; namely wind static loading, wind buffeting, vortex shedding, galloping, flutter, wake-induced loading, rain-wind instabilities of cables, and dry galloping of cables (Nikitas, 2011). Despite that the notorious failure of the Tacoma Narrows Bridge, Washington, USA in 1940 prompted intensive research on wind-induced loading, a lot of these mechanisms, and the parameters affecting them, are not yet fully understood. However, the intuitive assumption that higher wind speeds correspond to higher actions on bridges is generally true for many of these mechanisms; see, e.g., Nikitas (2011). Aside from the higher future wind speeds, the more frequent precipitation events increase the risk of rain-wind cable instabilities. Additionally, buffeting is also affected by wind turbulence intensity which may as well be influenced by climate change. In Seo and Caracoglia (2015), it is demonstrated that climate change can influence the flutter risk for long-span bridges. In another relevant study, Ryan et al. (2016) studied the effect of climate change on wind failures of timber power pole networks. In this work, it is shown that, under a high-emissions scenario, approximately a 60% increase of wind failures in Brisbane, Australia is predictable for the period until 2070. A number of other studies also assessed the effect of climate change on this risk; see, e.g., Mudd et al. (2014a, 2014b), Rosowsky (2018), and Salman et al. (2017).

4.4.3. Risk I3: additional snow loads on covered bridges

The projected increase in snowfall intensity in some locations can put covered bridges at risk. Many covered bridges are still in operation, e.g., the Hartland Bridge in Hartland; New Brunswick; Canada and the Holzbrücke

Bad Säckingen Bridge connecting Germany and Switzerland. Although most covered bridges are nowadays only open for pedestrians, some are still being used as traffic bridges, e.g., the Conwy Railway Bridge, North Wales, UK.

4.4.4. Risk I4: higher risk of thermally induced stresses

The projected temperature changes in the future climate may place an increased demand on the deformation capacity of bridges and potentially increase the restrained thermal stresses (Holper et al., 2007; Karl et al., 2009; Schwartz, 2010; TRB, 2008). This risk is demonstrated by the case of DuSable Bridge, Chicago, USA. During the July 2018 heatwave, this movable bridge that opens its decks to allow navigation in the Chicago River could not be opened due to the heat-induced closure of its joint. Thermally induced stresses are of particular importance to bridges. For example, Hejnic (1988) found that the tensile stresses due to temperature gradients were larger than those due to the whole live load for the Klement Gottwald Bridge, Prague, Czech Republic. Furthermore, the possible higher solar radiation in some places may increase the temperature gradient between the top and bottom of bridge decks and result in stress increases.

4.4.5. Risk I5: additional demand on drainage capacity

The projected increase in precipitation in some locations will place an increased demand, and possibly overwhelm, the drainage system of bridges. This risk is relevant to the whole urban drainage system and is not only particular to bridges; see, e.g., Berggren (2007), and Olofsson (2007).

4.4.6. Risk I6: higher hydrostatic pressure behind bridge abutments

As discussed previously, precipitation is projected to increase in many locations in the future. Meyer (2008) notes that this increase in precipitation may result in a higher GWT in these locations leading to additional hydrostatic pressure building up behind bridge abutments.

4.4.7. Risk I7: increased load on bridges with control sluice gates

Flood protection barriers, e.g., the Morganza spillway in Louisiana; USA (e.g., Balaguru & Gopu, 2016; Rupnow, 2010), and flow control structures for irrigation purposes, e.g., Chamravattom Regulator cum Bridge and Koottayi Regulator Cum Bridge in Kerala; India (e.g., Abdul Hakkim et al., 2013; Ajith & James,

2016), are sometimes designed to serve as highway or railway bridges as well. The higher precipitation in some regions and SLR will increase the water head these structures are demanded to support and as a result, additional loads on the abutments and piers of these structures will be introduced. This risk is also relevant for other hydraulic structures; see, e.g., Ankum (2002), Chanson (2004), Novak et al. (2014), and Zevenbergen et al. (2012).

4.4.8. Risk 18: increased stresses due to the faster loss of prestressing force

Loss of prestressing is divided into immediate losses and time-dependent losses. Two major components of the time-dependent loss of prestress force are those related to creep and shrinkage; see, e.g., Aalami (1998), Hernandez and Gamble (1975), and Zia et al. (1979). As discussed in risk S2, several future climate changes may lead to increased creep and subsequently increased creep losses. On the other hand, shrinkage losses are also increased by the projected lower relative humidity (e.g., Aalami, 1998; Bažant & Baweja, 1995; Hernandez & Gamble, 1975; Zia et al., 1979).

4.4.9. Risk 19: higher ice-induced loads

Ice affects bridges located in environments subject to ice covers in a number of ways; see, e.g., Beltaos, Burrell, Miller, & Sullivan (2003), Fransson (1988), and US Army Corps of Engineers (2006). Firstly, the temperature variations of the ice cover cause thermal ice expansion or contraction which exerts a lateral pressure on bridge piers (Fransson, 1988). Several bridges have been damaged by thermal ice pressure; for example, the bridge at Kusforsen in Skellefte River, Sweden in 1980 (Fransson, 1988). Vertical forces on piers can also result from the vertical movements of the ice cover due to water-level fluctuations (US Army Corps of Engineers, 2006). Moreover, after ice cover break-up the dynamic force from ice floes collision with bridge piers, which is dependent on floe size and ice strength (Beltaos et al., 2003), can be significant. Lastly, ice jams under bridges can impose pressure on the piers, damage bridge superstructure; for example, Honeymoon Bridge over the Niagara River, Ontario, Canada in 1936 and the Perth-Andover Bridge over the Saint John River, New Brunswick, Canada in 1987; increase the scour rate under bridge piers or even cause severe floods (Beltaos et al., 2003).

Climate change may considerably influence river ice regimes (Beltaos, 2004) and consequently affect the severity of the mentioned impacts. A higher seasonal temperature contrast, which is projected by some studies at some locations (e.g., Imada et al., 2017), can

increase the risk of thermal ice pressure. Increase in water level fluctuations, indicated in some rivers, e.g. (Úbeda et al., 2013), may also increase the vertical forces on piers. Moreover, more severe ice jams may be assumed due to the higher temperatures and precipitation in the future. For instance, Beltaos & Burrell (2003) and Beltaos (2004) suggest that climate change can cause more frequent and more severe spring and mid-winter ice jams along many Canadian rivers. On the other hand, a lower dynamic impact from ice floes can result from climate change as the higher future temperatures can cause a decrease in the thickness (Prowse et al., 2011) and strength (US Army Corps of Engineers, 2006) of ice floes. The analysis of the Confederation Bridge, New Brunswick, Canada sensor readings (Brown et al., 2010) supports this suggestion.

4.5. Risk group A: accidental loads risks

4.5.1. Risk A1: higher chance of water vessel collisions

It is well established that higher liquid water content leads to lower visibility during fogs (Houghton & Radford, 1938). This is again underscored by more recent studies (e.g., Wu et al., 2007). Noting that under the projected future warming the in-cloud liquid water content of marine fogs is projected to increase (Kawai et al., 2016), a higher risk of ship collisions can be reasonably inferred. Qu et al. (2015) maintain that climate change is at least partly responsible for the observed steady decrease in winter visibility over eastern China. The projected higher future waves in some places, as discussed in risk I1, can lead to more difficult navigation and further increase this risk. The 1980 Almö Bridge incident in Sweden, in which the bridge collapsed due to a water vessel collision, illustrates this risk. Another example, which happened in 1980 as well, is the collapse of a 396 m section of the Sunshine Skyway Bridge, Florida, USA due to a ship collision (Cook et al., 2015; Wuttrich et al., 2001).

4.5.2. Risk A2, risk A3, and risk A4: higher chance of vehicle-pier collisions, vehicle accidents, and train-pier collisions

Similar to risk A1, the reduced visibility during fogs increases the risk of vehicle-pier collisions. Furthermore, the projected increase in precipitation in some places leads to more slippery roads and increases the chance of such accidents. These two climatic factors can also lead to the risk of more frequent vehicle accidents. Although at first sight this risk may seem insignificant, more frequent vehicle accidents, as well as more frequent vehicle-pier collisions, increase the chance of bridge damage due to

fire that may result from these accidents. According to Woodworth (2013), the risk of bridge fire exposure is strongly dependent on the likelihood of vehicle accidents to take place at the bridge. Lastly, a higher chance of damage to pavements and rails, as discussed in risk S1, can increase the occurrence of train derailments and consequently increase the chance of train-pier accidents, as well as vehicle-pier collisions and vehicle accidents. For more on the probabilistic analysis of vehicle-pier and train-pier collisions the reader is referred to Björnsson (2015).

4.6. Risk group E: extreme natural events risks

4.6.1. Risk E1: increase in intensity and/or frequency of floods

Flooding is known to be one of the most damaging natural hazards to Infrastructure, including bridges. Jevrejeva et al. (2018) maintain that one of the costliest effects of climate change could be the possible increase in the intensity and frequency of floods. Several studies (e.g., Batchabani et al., 2016; GDV, 2011; Hoeppe, 2016), establish that a significant increase in the risk of flooding under the future climatic conditions is likely. In GDV (2011) for instance, it is stated that a flood that currently has a 50-year return period may only have a 20-year return period within the next 30 years. The projected SLR and increase in precipitation can aggregate causing higher and more frequent floods. Moreover, in The World Bank (2012) it is suggested that the projected decrease in ocean pH, increase in ocean temperature, and increase in the intensity and frequency of tropical cyclones can negatively impact the growth of coral reefs; reefs that naturally decrease the impact of floods. Beck et al. (2018) show that the annual expected damages from flooding would double without coral reefs. As an example of how devastating the impact of future floods to bridges can be, Batchabani et al. (2016) studied the effect of climate change on flood levels in the Riviere Des Prairies Basin; Quebec; Canada and found that flood levels for the period 2040–2060 will totally submerge two bridges in the study area.

In addition to exacerbating the risk of flooding, SLR can also pose considerable threats on existing and future bridge assets as well as other infrastructure; see, e.g., Meyer and Weigel (2011), Mondoro et al. (2018), and TRB (2008). For instance, Wu et al. (2009) estimated an inundation area of up to

3800 km² for the Mid- and Upper-Atlantic region of the United States by the end of the century. Furthermore, Mondoro et al. (2018) draw attention to the possibility that many coastal bridges, despite not being inundated by water, may become unusable as a result of the permanent submersion of roadways in coastal zones. Gornitz et al. (2002), McInnes et al. (2003), and Titus and Richman (2001) are examples of other studies which address the potential impacts of SLR.

4.6.2. Risk E2: increase in intensity and/or frequency of storms

The IPCC (2013) maintains that it is virtually certain, i.e., more than 99% probability, that since the 1970s intense tropical cyclones have increased over the North Atlantic and it is more likely than not, more than 50% probability, that further increases will be observed in the future. Schwartz (2010) states that a storm event that had a 100 years return period in the past may now have a return period of only 20 years.

The devastating effects of storms to bridges have repeatedly been reported. In hurricane Katrina 2005, lifting and unseating of bridge decks due to storm surges was one of the main observed failure mechanisms (Meyer, 2008; Padgett et al., 2008). In addition to the stronger and more frequent storms, the higher surge launching level offered by SLR and the projected higher future waves further exacerbate this risk.

4.6.3. Risk E3: increase in intensity and/or frequency of wildfires

A considerable increase in the frequency and/or intensity of wildfires in some locations is predictable under the future higher temperatures and decreased precipitation in some locations; see, e.g., Kerr et al. (2018), Lozano et al. (2017), Song and Lee (2017), Strydom and Savage (2017), and Stambaugh et al. (2018). This increase places bridges, and other infrastructure, in the vicinity at an elevated risk. The damage of the famous Royal Gorge Bridge, Colorado, USA in the 2013 wildfire exemplifies this risk. Another incident that is arguably attributable to brushfires is the failure of the railroad bridge in San Saba, Texas, USA also in 2013 (Brun et al., 2014). In addition to changes in temperature and precipitation, the projected faster winds in some locations may further aggravate this risk by increasing the fire spread (Song & Lee, 2017).

4.7. Risk group O: operational risks

4.7.1. Risk O1: additional operational costs for snow removal

The projected increase in snowfall in some locations may result in an increase in the costs associated with snow removal or even increase the occurrence of bridge blockages. On the other hand, a reduction in such costs and occurrences can be expected at locations where a decrease in snowfall is projected as a result of climate change; see, e.g., Karl et al. (2009) and TRB (2008).

4.7.2. Risk O2: more frequent temporary bridge restrictions

If sustained fast wind speeds are observed for a considerable period of time, e.g., 10–15 min, restrictions on which vehicles are allowed to cross the bridge are applied. These restrictions cause detours for some vehicles and result in additional user costs. Considering that faster winds are projected for some locations in the future more frequent bridge restrictions can be expected. Moreover, if climate change increases ice accretion on bridge members more frequent bridge closures may be expected (Kleissl & Georgakis, 2010). For instance, Kleissl and Georgakis (2010) report that the Øresund Bridge connecting Denmark and Sweden has had to close 5 times between the years 2001 and 2010 due to ice accretion. Similar observations have been noted for other North European bridges (Kleissl & Georgakis, 2010). Nevertheless, such bridge restrictions may be decreased at some locations due to some of the projected climatic changes, e.g., a reduction in wind speeds or warmer conditions reducing the risk of ice accretion.

4.7.3. Risk O3: increased risk of power shortage

Several factors of the projected future climate may threaten the availability of energy. The future wind energy can be affected by changes in wind speeds and, for some areas such as Scandinavia, atmospheric icing (Mideksa & Kallbekken, 2010). Carvalho et al. (2017), Davy et al. (2018), Gonçalves-Ageitos et al. (2015), and Soares et al. (2017) predict a reduction in wind energy output during some seasons in some regions. The higher future temperatures are expected to reduce electricity production from thermal power plants (Mideksa & Kallbekken, 2010). The decrease in precipitation in some places accompanied by the increased evaporation due to the higher temperatures may adversely impact the output of hydropower plants. Furthermore, more power outage events due to the increased frequency of extreme events, e.g., storms, is expectable.

This increased risk of energy shortage can affect the operation of bridges, as well as all other Infrastructure, in many ways. Most trains depend on electricity for their operation and therefore railway bridges operation is affected. Inoperative traffic and road lights may hinder the flow of traffic on highway bridges. The operation of movable bridges is also dependent on power. Lastly, the operation of structural health monitoring systems is also impacted by power outages. A detailed investigation of the consequences of power outages on different Infrastructure is presented in Petermann et al. (2011).

5. The interconnectedness of risks

Rarely can one single cause be identified as the only reason for a bridge failure. Bridge failure often happens due to the unfortunate aggregation of several factors going wrong simultaneously (Hong et al., 2012). Hence, it is rather important to view the previously mentioned risks holistically instead of in isolation. Most of these risks may add up to one another to cause bridge failures. For instance, the increased hydrostatic pressure behind bridge abutments, risk I6, can combine with the risk of accelerated scour rates, risk G1, and the durability risks, risk group D, to cause failure.

Furthermore, some of the previously mentioned risks are interdependent, i.e., the occurrence of one risk may affect the criticality of another risk. For instance, the occurrence of a landslide, risk G3, may lead to the closure of expansion joints of bridges in the vicinity and consequently aggravate the risk of thermally induced stresses, risk I4. This can be highlighted by the case of the Deer Creek bridge, Saskatchewan, Canada (Kelly et al., 1995; Toll et al., 2012). Due to an active landslide, a 13–80 mm closure of the bridge expansion joints was observed. Another example of risk interdependency is that if collapse settlement happens in a region, this region becomes more susceptible to flooding (Charles & Watts, 1996; Toll et al., 2012). Furthermore, the occurrence of a wildfire event in a region causes the formation of a water-repellant soil layer below the surface, which increases the surface run-off, and burns the roots of vegetation. Consequently, the criticality of flash floods, debris flows, and landslides risks increase following a wildfire event; see, e.g., Cannon and DeGraff (2009), Elliott and Parker (2001), Kean et al. (2011), Moody and Martin (2001), Neary et al. (2003), and Shakesby & Doer (2006). As an example, Elliott and Parker (2001) cite the floods that followed the May 1996 Buffalo Creek, Colorado, USA forest fire. Moreover, heat-induced damage to pavements can increase the risk of vehicle accidental loads. Lastly, the

risk of scour is elevated during a flooding event, referred to as pressure flow scour. Many other such interdependencies between the identified risks may exist.

6. Discussion and further work

In this work, a review of the potential risks of climate change on bridges was made. In total, 31 potential climate change risks to bridges were identified and presented. Some of the possible ways in which the presented risks may interact were also briefly discussed. Although this review was intended to be as comprehensive as possible, the list of identified risks and/or their possible interactions should be updated as better information become available in the future.

Figure 3 and Table 2 summarize the risks identified in this paper. The innermost circle in Figure 3 shows

the different risk groups. Moving outwards, the risks within each of these groups are then presented, followed by the climatic parameters driving each of them on the outermost part of the figure. In addition, the risk interdependencies presented in the previous section are represented by arrows connecting the interdependent risks. As indicated by Table 2, the projected increase in precipitation in some regions and the projected future increase in temperatures seem to be the two most attention-worthy climatic parameters in terms of the number of risks they may influence. While each of the two climatic parameters may contribute to 18 potential risks, the two climatic drivers combined can affect 25 of the 31 investigated risks. If increase in wind speeds is added to these two climatic drivers, 28 potential risks are foreseeable. Figure 3 and Table 2 can be augmented to include other risks, and/

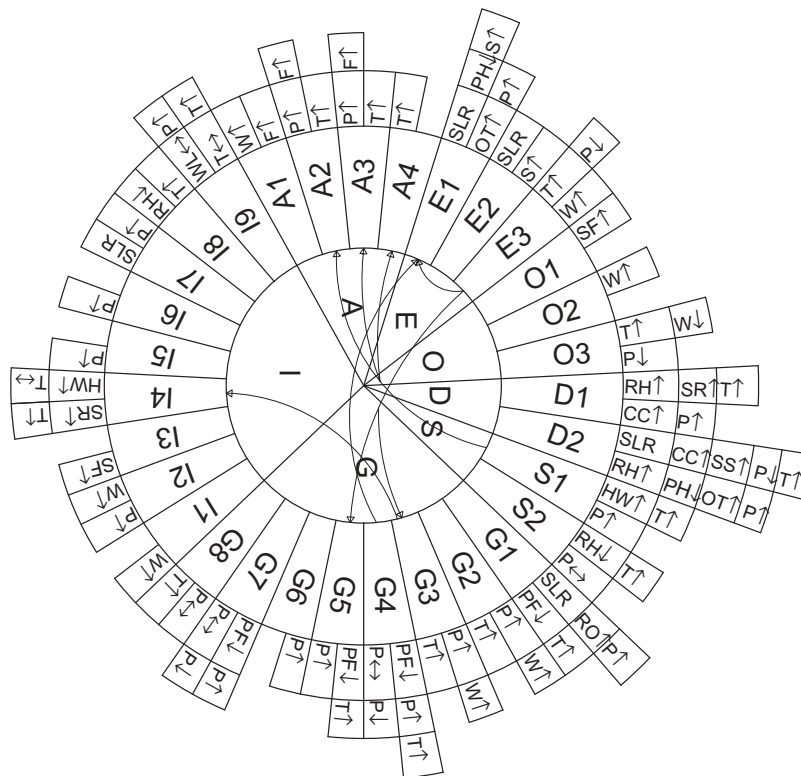


Figure 3. Identified climate-change risks on bridges and the climate changes affecting them. Inside to outside: risk group, identified risk, responsible climatic change parameters. Arrows connecting the different risks represent the discussed interdependencies.^b

^bD1: accelerated degradation of superstructure, D2: accelerated degradation of substructure, S1: heat-induced damage to pavements and railways, S2: increased long-term deformations, G1: higher scour rates, G2: bridge slope failure, G3: landslides, G4: foundation settlement, G5: rockfalls; debris flows; and snow avalanches, G6: soil liquefaction, G7: additional loads on piles, G8: clay shrinkage and swelling, I1: higher wave impact, I2: wind-induced loads, I3: additional snow loads on covered bridges, I4: thermally induced stresses, I5: drainage capacity, I6: hydrostatic pressure behind abutments, I7: loads on bridges with control sluice gates, I8: loss of prestressing force, I9: ice-induced loads, A1: water vessel collisions, A2: vehicle-pier collisions, A3: vehicle accidents, A4: train-pier collisions, E1: floods, E2: storms, E3: wildfires, O1: snow removal costs, O2: temporary bridge restrictions, O3: power shortage; P↑, P↓: higher and lower precipitation in some regions, respectively, T↑, T↓: higher temperatures, W↑, W↓: more frequent/intense extreme winds, SLR: sea level rise, RH↑, RH↓: increase and decrease in relative humidity, respectively, PF↓: permafrost melt, P↔: increase in precipitation contrast, F↑: higher in-cloud liquid water content of marine fogs, CC↑: higher carbon concentrations, SR↑: higher solar radiation, OT↑: higher ocean temperature, PH↓: decrease in global ocean pH, SF↑: higher snowfall, S↑, S↓: increase in storms intensity/frequency, HW↑: increase in intensity/frequency of heatwaves, T↔: higher temperature seasonal contrast, RO↑: higher run-off, W↓: decrease in wind speeds, WL↔: increased water fluctuations in rivers, SS↑: higher soil salinity.

Table 2. Relevant climate change parameters and the affected risks. ^a

	Climate-change parameter																				
	P↑	T↑	W↑	SLR	P↓	RH↓ & RH↑	PF↓	P↔	F↑	CC↑	SR↑	OT↑	PH↓	SF↑	S↑	HW↑	T↔	RO↑	W↓	WL↔	SS↑
Affected risks	D1	D1	G2	D2	D2	D1	G1	S2	A1	D1	D1	D2	D2	I3	E1	S1	I4	G1	O3	I9	D2
	D2	D2	G3	G1	G4	D2	G4	G4	A2	D2	I4	E1	E1	O1	E2	I4	I9				
	S1	S1	I1	I7	G7	S2	G5	G7	A3												
	G1	S2	I2	E1	E3	I8	G7	G8													
	G2	G1	A1	E2	O3																
	G3	G2	E3																		
	G4	G3	O2																		
	G5	G4																			
	G6	G5																			
	G7	G8																			
	I2	I4																			
	I5	I8																			
	I6	I9																			
	I7	A2																			
	I9	A3																			
	A2	A4																			
	A3	E3																			
	E1	O3																			
	Σ	18	18	7	5	5	4	4	4	3	2	2	2	2	2	2	2	1	1	1	1

a D1: accelerated degradation of superstructure, D2: accelerated degradation of substructure, S1: heat-induced damage to pavements and railways, S2: increased long-term deformations, G1: higher scour rates, G2: bridge slope failure, G3: landslides, G4: foundation settlement, G5: rockfalls; debris flows; and snow avalanches, G6: soil liquefaction, G7: additional loads on piles, G8: clay shrinkage and swelling, I1: higher wave impact, I2: wind-induced loads, I3: additional snow loads on covered bridges, I4: thermally induced stresses, I5: drainage capacity, I6: hydrostatic pressure behind abutments, I7: loads on bridges with control sluice gates, I8: loss of prestressing force, I9: ice-induced loads, A1: water vessel collisions, A2: vehicle-pier collisions, A3: vehicle accidents, A4: train-pier collisions, E1: floods, E2: storms, E3: wildfires, O1: snow removal costs, O2: temporary bridge restrictions, O3: power shortage; P↑, P↓: higher and lower precipitation in some regions, respectively, T↑: higher temperatures, W↑: more frequent/intense extreme winds, SLR: sea level rise, RH↑, RH↓: increase and decrease in relative humidity, respectively, PF↓: permafrost melt, P↔: increase in precipitation contrast, F↑: higher in-cloud liquid water content of marine fogs, CC↑: higher carbon concentrations, SR↑: higher solar radiation, OT↑: higher ocean temperature, PH↓: decrease in global ocean pH, SF↑: higher snowfall, S↑: increase in storms intensity/frequency, HW↑: increase in intensity/frequency of heatwaves, T↔: higher temperature seasonal contrast, RO↑: higher run-off, W↓: decrease in wind speeds, WL↔: increased water fluctuations in rivers, SS↑: higher soil salinity.

or interdependencies, not presented in this work. Such display items can be used to effectively communicate the results of climate-change risk identification processes for Infrastructure for further consideration in subsequent risk assessments, e.g., risk prioritization.

As can be seen from this study, a wide range of impacts are predictable. However, depending on the specifics of a certain bridge (i.e., geographical location, site characteristics, structural system, etc.) the potential climate change impacts and their possible consequences will vary. For instance, scour will only concern bridges crossing waterways, liquefaction will only be a potential risk if the bridge is located in a seismically active region, permanent inundation due to SLR is only relevant for coastal bridges, and wind-induced instabilities are particularly relevant for slender (i.e., suspension and cable-stayed) bridges. Further research is needed before any conclusive remarks about the severity, likelihood, or even plausibility of the identified risks are made. Therefore, no claims about which climate-change risk, or climatic parameter, is more critical can be made based on the results of this study. A study with the aim of developing a climate-change risk prioritization framework for bridges is planned in the future.

For the purpose of performing such a prioritization, characteristics identifying each risk need to be considered. For instance, some of the investigated risks, e.g., D1; D2; G1; G4 and E1, can be separately driven by a large number of climatic parameters while others can be driven by only one parameter, e.g., G6, I1, and I3. Furthermore, the fact that climate models can project the different climatic parameters with varying certainty should be considered in the prioritization. Additionally, the strength of evidence supporting the occurrence of each risk as a result of climate change is relevant. Other factors such as the bridge vulnerability and the size of potential consequences are also of significance.

7. Conclusions

The effects of climate change on the performance and safety of Infrastructure, although potentially severe, have, up to now, been mostly overlooked in both practice and research. This work attempts to draw more attention to the potential risks climate change may pose on an essential part of modern infrastructure; bridges. The findings of over 190 research articles were synthesized to identify the presented risks. The method used in the paper can be used for updating the list of

climate change risks as better information become available in the future. In total 31 potential climate change risks have been identified, categorized, and presented in this paper. The results of this review indicate that the two climatic parameters that may cause the highest number of risks in the future are the higher future temperatures and the increase in precipitation in some regions. However, no claims about which climate-change risk, or climatic parameter, is more critical can be made based on this research article. Further research is needed before any conclusive remarks about the severity, likelihood, or even plausibility of the presented risks are made. Developing a holistic climate-change risk prioritization framework for bridges will be the aim of future research. This review can be of high value for bridge managers in better managing the risk of climate change to existing infrastructure. Although this paper specifically addresses bridges, many of the mentioned risks may also affect many other infrastructure types, e.g., tunnels, dams, and underground pipes.

Acknowledgments

The authors acknowledge the financial support provided by the Swedish Transport Administration and the strategic innovation program InfraSweden2030, a joint effort of Sweden's Innovation Agency (Vinnova), the Swedish Research Council (Formas) and the Swedish Energy Agency (Energimyndigheten). Any opinions, findings, or conclusions stated herein are those of the authors and do not necessarily align with those of the financiers.

Disclosure statement

No potential conflict of interest was reported by the authors.

Funding

This work was supported by the Swedish Transport Administration (Trafikverket) [grant number 2016-008] and Sweden's Innovation Agency (Vinnova) [grant number 2018-00611].

Notes on contributors

Amro Nasr is a graduate research/teaching assistant and PhD student at the Division of Structural Engineering, Lund University, Sweden. His research interests are in the areas of infrastructure risk assessment, reliability, and the application of probabilistic methods in engineering. His PhD project focuses on identifying climate change risks related to bridges and developing probabilistic methods for assessing these risks both qualitatively and quantitatively.

Ivar Björnsson is an associate senior lecturer at the Division of Structural Engineering, Lund University, Sweden. His main interests include structural safety, risk and reliability, design of structural robustness, principles of engineering design, as well as promoting interdisciplinarity in engineering research and practice.

Dániel Honfi is a researcher at the Department of Safety at RISE Research Institutes of Sweden. His main research is focused on the performance of structures and infrastructure systems concerning safety, serviceability, robustness and lately resilience.

Oskar Larsson Ivanov is a senior lecturer at the Division of Structural Engineering, Lund University, Sweden. His primary research interests concern climate related loads on buildings and infrastructure, the effects of climate change on climate related loads and design principles, and the application of probabilistic methods in engineering.

Jonas Johansson is an associate professor in Critical Infrastructure at the Division of Risk Management and Societal Safety, Lund University, Sweden. His main research interests are resilience, vulnerability, and risk management of complex systems, particularly large-scale interdependent critical infrastructure and how society depends on the services these provide.

Erik Kjellström is a professor in Climatology at the Swedish Meteorological and Hydrological Institute, Norrköping, Sweden. His main research interests relate to climate, climate variability, and climate change. His research aims at providing insight to questions such as: To what extent can climate models reproduce the observed climate? How can ensembles of climate projections be used to illustrate uncertainties and robustness in future climate change? How can climate scenarios be used to provide useful climate services?

ORCID

Amro Nasr  <http://orcid.org/0000-0002-8322-3079>
 D. Honfi  <http://orcid.org/0000-0001-5879-7305>
 O. Larsson Ivanov  <http://orcid.org/0000-0002-2772-5832>
 E. Kjellström  <http://orcid.org/0000-0002-6495-1038>

References

- Aalami, B. O. (1998). Time-dependent analysis of post-tensioned concrete structures. *Progress in Structural Engineering and Materials*, 1(4), 384–391.
- Abdul Hakkim, V. M., Praveena, N., Rakhi, J. F., & Ajay Gokul, A. J. (2013). Impact study of Koottayi regulator cum bridge. *International Journal of Engineering Research and Development*, 9(3), 1–4.
- Ajith, M. P., & James, M. K. (2016). Impact of Chamravattam regulator cum bridge on Bharathapuzha river and adjacent areas. *Indian Journal of Economics and Development*, 4(1), 2320–9828.
- Andrady, A. L., Hamid, H. S., & Torikai, A. (2003). Effects of climate change and UV-B on materials. *Photochemical and Photobiological Sciences*, 2, 68–72.

- Ankum, P. (2002). *Design of open-channels and hydraulic structures*. Delft, the Netherlands: Section Water Management, Delft University of Technology.
- Anyala, M., Odoki, J. B., & Baker, C. (2011, January–February). Assessment of the impact of climate change on road maintenance. In J. A. Mwakali & H. M. Alinaitwe (Eds.), *Proceedings of the 2nd international conference on advances in engineering and technology (AET2011)* 457–463. Entebbe, Uganda: MacMillan.
- Army, U. S., & Engineers, C. O. (2006). *Engineering and design-ice engineering (engineer manual EM 1110-2-1612)*. Washington, DC: Department of the Army, U.S. Army Corps of Engineers.
- Arnell, N. W., & Gosling, S. N. (2013). The impacts of climate change on river flow regimes at the global scale. *Journal of Hydrology*, 486, 351–364.
- Arneson, L., Zevenbergen, L., Lagasse, P., & Clopper, P. (2012). *Evaluating scour at bridges fifth edition* (Report No. FHWA-HIF-12-003) (HEC-18). Washington, DC: FHWA.
- Balaguru, P. N., & Gopu, V. J. (2016). *Repair of morganza spillway bridge bent pile cap using carbon fiber reinforcement (CFR)* (Report No. FHWA/LA.15/552). Baton Rouge, LA: Department of Civil and Environmental Engineering, Louisiana State University.
- Bank, T. W. (2012). *Turn down the heat-why a 4 °C warmer world must be avoided*. (A report for the World Bank by the Potsdam Institute for Climate Impact Research and Climate Analytics). Washington, DC: The World Bank.
- Bastidas-Arteaga, E., Schoefs, F., Stewart, M. G., & Wang, X. (2013). Influence of global warming on durability of corroding RC structures: A probabilistic approach. *Engineering Structures*, 51(Part A), 259–266.
- Bastidas-Arteaga, E., & Stewart, M. G. (2015). Damage risks and economic assessment of climate adaptation strategies for design of new concrete structures subject to chloride-induced corrosion. *Structural Safety*, 52, 40–53.
- Batchabani, E., Sormain, E., & Fuamba, M. (2016). Potential impacts of projected climate change on flooding in the riviere des prairies Basin, Quebec, Canada: One-dimensional and two-dimensional simulation-based approach. *Journal of Hydraulic Engineering*, 21(12), 05016032.
- Bazant, Z. P., & Baweja, S. (1995). Creep and shrinkage prediction model for analysis and design of concrete structures-model B3. *Materials and Structures*, 28 (357–365), 415–430.
- Bazant, Z. P., Hubler, M. H., & Yu, Q. (2011). Pervasiveness of excessive segmental bridge deflections: Wake-up call for creep. *ACI Structural Journal*, 108(6), 766–774.
- Bazant, Z. P., & Panula, L. (1978). Practical prediction of time-dependent deformations of concrete. *Materials and Structures (RILEM, Paris)*, Part IV, 11, 425–434.
- Beck, M. W., Losada, I. J., Menéndez, P., Reguero, B. G., Díaz-Simal, P., & Fernández, F. (2018). The global flood protection savings provided by coral reefs. *Nature Communications*, 9, 2186.
- Bell, K. (2008). Timber bridges. In *In Leonardo da Vinci Pilot Project TEMTIS*. 209–226. Handbook 1- Timber structures. Retrieved from <http://fast10.vsb.cz/temtis/en/>
- Beltaos, S. (2004). Climate impacts on the ice regimes of an Atlantic river. *Nordic Hydrology*, 35(2), 81–99.
- Beltaos, S., & Burrell, B. C. (2003). Climatic change and river ice breakup. *Canadian Journal of Civil Engineering*, 30(1), 145–155.
- Beltaos, S., Burrell, B. C., Miller, L., & Sullivan, D. (2003, June). *Hydraulic interaction between ice and bridges. Paper presented at the 12th workshop on the hydraulics of ice covered rivers*, Edmonton, AB, Canada. CGU HS Committee on River Ice Processes and the Environment.
- Berggren, K. (2007). *Urban drainage and climate change - impact assessment* (Licentiate thesis). Retrieved from www.diva-portal.org/smash/get/diva2:998949/FULLTEXT01.pdf
- Björnsson, I. (2015). *Holistic approach in engineering design: Controlling risks from accidental hazards in bridge design* (Doctoral dissertation). Retrieved from <http://lup.lub.lu.se/record/8052270>
- Bloom, A., Kotroni, V., & Lagouvardos, K. (2008). Climate change impact of wind energy availability in the eastern mediterranean using the regional climate model PRECIS. *Natural Hazards and Earth System Sciences*, 8, 1249–1257.
- Borges, J. F. (1997). Basic concepts of structural design. In C. G. Soares (Ed.), *Probabilistic methods for structural design* (pp. 1–15). Dordrecht, Netherlands: Kluwer.
- Briaud, J. L., Brandimarte, L., Wang, J., & D’Odorico, P. (2007). Probability of scour depth exceedance owing to hydrologic uncertainty. *Georisk*, 1(2), 77–88.
- Briaud, J. L., Gardoni, P., & Yao, C. (2014). Statistical, risk, and reliability analyses of bridge scour. *Journal of Geotechnical and Geoenvironmental Engineering*, 140(2), 04013011.
- Brown, T. G., Tibbo, J. S., Tripathi, D., Obert, K., & Shrestha, N. (2010). Extreme ice load events on the confederation bridge. *Cold Regions Science and Technology*, 60, 1–14.
- Brun, M., Giaccu, G. F., Movchan, A. B., & Slepian, L. I. (2014). Transition wave in the collapse of the san saba bridge. *Frontiers in Materials*, 1, 1–12.
- Cady, P. D., & Weyers, R. E. (1984). Deterioration rates of concrete bridge decks. *Journal of Transportation Engineering*, 110(1), 34–44.
- Cannon, S. H., & DeGraff, J. (2009). The increasing wildfire and post-fire debris-flow threat in western USA, and implications for consequences of climate change. In K. Sassa & P. Canuti (Eds.), *Landslides – disaster risk reduction* (pp. 177–190). Berlin & Heidelberg, Germany: Springer-Verlag.
- Capon, R., & Oakley, G. (2012). *Climate change risk assessment for the built environment sector*. (defra project code GA0204). London: Department for Environment, Food and Rural Affairs.
- Carll, C., & Wiedenhoeft, A. C. (2009). Moisture-related properties of wood and the effects of moisture on wood and wood products. In H. R. Trechsel & M. T. Bomberg (Eds.), *Moisture control in buildings: The key factor in mold prevention* (pp. 54–79). West Conshohocken, PA, USA: ASTM International.
- Carvalho, D., Rocha, A., Gómez-Gesteira, M., & Silva Santos, C. (2017). Potential impacts of climate change on European wind energy resource under the CMIP5 future climate projections. *Renewable Energy*, 101, 29–40.
- Changnon, S. A., Kunkel, K. E., & Reinke, B. C. (1996). Impacts and responses to the 1995 heat wave: A call to

- action. *Bulletin of the American Meteorological Society*, 77, 1497–1506.
- Chanson, H. (2004). *The hydraulics of open channel flow: An introduction: Basic principles, sediment motion, hydraulic modelling, design of hydraulic structures*. Oxford: Elsevier Butterworth-Heinemann.
- Chapman, R. J. (2001). The controlling influences on effective risk identification and assessment for construction design management. *International Journal of Project Management*, 19, 147–160.
- Charles, J. A., & Watts, K. S. (1996). The assessment of the collapse potential of fills and its significance for building on fill. *Proceedings Institution of Civil Engineers-Geotechnical Engineering*, 119(1), 15–28.
- Chaves, I. A., Melchers, R. E., Peng, L., & Stewart, M. G. (2016). Probabilistic remaining life estimation for deteriorating steel marine infrastructure under global warming and nutrient pollution. *Ocean Engineering*, 126, 129–137.
- Chen, H., Lee, C. F., & Law, K. T. (2004). Causative mechanisms of rainfall-induced fill slope failures. *Journal of Geotechnical and Geoenvironmental Engineering*, 130(6), 593–602.
- Cheung, C. W. S., Walsh, F. C., Campbell, S. A., Chao, W. T., & Beech, I. B. (1994). Microbial contributions to the marine corrosion of steel piling. *International Biodeterioration & Biodegradation*, 1994, 259–274.
- Chin, J. W., Nguyen, T., & Aouadi, K. (1997). Effects of environmental exposure on fiber-reinforced plastic (FRP) materials used in construction. *Journal of Composites Technology and Research*, 19(4), 205–213.
- Chok, Y. H., Kaggwa, W. S., Jaksa, M. B., & Griffiths, D. V. (2004, February). Modelling the effects of vegetation on stability of slopes. In G. Farquhar, P. Kelsey, J. Marsh, & D. Fellows (Eds.), *proceedings of the 9th Australia New Zealand conference on geomechanics* 391–397. Auckland, New Zealand: Centre for Continuing Education, The University of Auckland.
- Ciabatta, L., Camici, S., Brocca, L., Ponziani, F., Stelluti, M., Berni, N., & Moramarco, T. (2016). Assessing the impact of climate-change scenarios on landslide occurrence in Umbria region, Italy. *Journal of Hydrology*, 541, 285–295.
- Collins, B. D., & Stock, G. M. (2016). Rockfall triggering by cyclic thermal stressing of exfoliation fractures. *Nature Geoscience*, 9, 395–401.
- Comité Européen du Béton. (1963). *Pratiques a l'Usage des Constructeurs*. Bulletin d'Information nQ 39. Paris, France: Comité Européen du Béton.
- Cook, W., Barr, P. J., & Halling, M. W. (2015). Bridge failure rate. *Journal of Performance of Constructed Facilities*, 29(3), 04014080.
- Corti, T., Muccione, V., Kollner-Heck, P., Bresch, D., & Seneviratne, S. I. (2009). Simulating past droughts and associated building damages in France. *Hydrology and Earth System Sciences*, 13(9), 1739–1747.
- Corus Construction and Industrial. (2005). *A corrosion protection guide: For steel bearing piles in a temperate climate*. North Lincolnshire: Corus Construction and Industrial.
- Cradden, L. C., Harrison, G. P., & Chick, J. P. (2006, June). *Climate change and the UK wind resource. Paper presented at European conference on impacts of climate change on renewable energy sources (EURENEW)*, Iceland.
- Crilly, M. (2001). Analysis of a database of subsidence damage. *Structural Survey*, 19(1), 7–15.
- Darwin, D., Browning, J. A., Gong, L., & Hughes, S. R. (2008). Effects of deicers on concrete deterioration. *ACI Materials Journal*, 105(6), 622–627.
- Dasgupta, S., Hossain, M. M., Huq, M., & Wheeler, D. (2015). Climate change and soil salinity: The case of coastal Bangladesh. *Ambio*, 44, 815–826.
- Davy, R., Gnaniuk, N., Pettersson, L., & Bobylev, L. (2018). Climate change impacts on wind energy potential in the European domain with a focus on the black sea. *Renewable and Sustainable Energy Reviews*, 81, 1652–1659.
- Deng, L., & Cai, C. S. (2010). Bridge scour: Prediction, modeling, monitoring, and countermeasures-review. *Practice Periodical on Structural Design and Construction*, 15(2), 125–134.
- Dikanski, H., Hagen-Zanker, A., Imam, B., & Avery, K. (2016). Climate change impacts on railway structures: Bridge scour. *Engineering Sustainability*, 170(ES5), 237–248.
- Dikanski, H., Imam, B., & Hagen-Zanker, A. (2018). Effects of uncertain asset stock data on the assessment of climate change risks: A case study of bridge scour in the UK. *Structural Safety*, 71, 1–12.
- DoT (Department of Transport). (2005). *The changing climate: Its impact on the department of transport*. UK: Department of Transport. <http://www.dft.gov.uk/pgr/science/research/key/thechangingclimateitsim>
- Ekström, G., Nettles, M., & Tsai, V. C. (2006). Seasonality and increasing frequency of greenland glacial earthquakes. *Science*, 311, 1756–1758.
- Elliott, J. G., & Parker, R. S. (2001). Developing a post-fire flood chronology and recurrence probability from alluvial stratigraphy in the buffalo creek watershed, Colorado, USA. *Hydrological Processes*, 15(2001), 3039–3051.
- England, G. L., & Ross, A. D. (1962). Reinforced concrete under thermal gradients. *Magazine of Concrete Research*, 14(40), 5–12.
- Flint, M. M., Fringer, O., Billington, S. L., Freyberg, D., & Diefenbaugh, N. S. (2017). Historical analysis of hydraulic bridge collapses in the continental United States. *Journal of Infrastructure Systems*, 23(3), 04017005.
- Fransson, L. (1988). *Thermal ice pressure on structures in ice covers* (Doctoral dissertation). Retrieved from <http://www.diva-portal.org/smash/get/diva2:990630/FULLTEXT01.pdf>
- Freudenthal, A. M. (1945). The safety of structures. *Transactions of the American Society of Civil Engineers*, 112, 125–180.
- Froehlich, D. C. (1989, August). Local scour at bridge abutments. In M. A. Ports (Ed.), *Proc. of the 1989 national conf. on hydraulic engineering* 13–18. New York, USA: ASCE.
- GDV (German Association of Insurers). (2011). *The climate change challenge, answers and demands of German insurers*. Berlin: GDV.
- Geymayer, H. G. (1972). *Effect of temperature on creep of concrete: A literature review*. Concrete for Nuclear Reactors, Vol. I, ACI Special Publication SP-34. 565–589. Detroit: American Concrete Institute
- Gonçalves-Ageitos, M., Barrera-Escoda, A., & Baldasano, J. M. (2015). Modelling wind resources in climate change scenarios in complex terrains. *Renewable Energy*, 76, 670–678.

- Gornitz, V., Couch, S., & Hartig, E. K. (2002). Impacts of sea-level rise in the New York City metropolitan area. *Global and Planetary Change*, 32, 61–88.
- Gruber, S., Hoelzle, M., & Haeberli, W. (2004). Permafrost thaw and destabilization of alpine rock walls in the hot summer of 2003. *Geophysical Research Letters*, 31, L13504.
- Gudipudi, P. P., Underwood, B. S., & Zalgout, A. (2017). Impact of climate change on pavement structural performance in the United States. *Transportation Research*, 57 (PartD), 172–184.
- Hampel, A., Hetzel, R., & Maniatis, G. (2010). Response of faults to climate-driven changes in ice and water volumes on earth's surface. *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 368(2010), 2501–2517.
- Harris, C., Arenson, L. U., Christiansen, H. H., Etzelmüller, B., Frauenfelder, R., Gruber, S., & Mühll, D. V. (2009). Permafrost and climate in Europe: Monitoring and modelling thermal, geomorphological and geotechnical responses. *Earth-Science Reviews*, 92(2009), 117–171.
- He, S., Yan, S., Deng, Y., & Liu, W. (2018). Impact protection of bridge piers against rockfall. *Bulletin of Engineering Geology and the Environment*, 2018. doi:10.1007/s10064-018-1250-5
- Hejnic, J. (1988). Thermal stresses in concrete bridges. *IABSE Congress Report*, 13, 425–430.
- Hernandez, H. D., & Gamble, W. L. (1975). *Time-dependent prestress losses in pre-tensioned concrete construction* (Structural Research Series No. 417). Urbana, Illinois: Civil Engineering Studies, University of Illinois.
- Hill, D. (2012). The lessons of Katrina, learned and unlearned. *Journal of Coastal Research*, 28(2), 324–331.
- Hoeppe, P. (2016). Trends in weather related disasters –consequences for insurers and society. *Journal of Weather and Climate Extremes*, 11, 70–79.
- Holper, P., Lucy, S., Nolan, M., Senese, C., & Hennessy, K. (2007). *Infrastructure and climate change risk assessment for victoria* (Report to the Victorian government). Australia: Commonwealth Scientific and Industrial Research Organisation.
- Holzer, S. M., Loferski, J. R., & Dillard, D. A. (1989). A review of creep in wood: Concepts relevant to develop long-term behavior predictions for wood structures. *Wood and Fiber Science*, 21(4), 376–392.
- Honfi, D. (2013). *Design for serviceability – A probabilistic approach* (Doctoral dissertation). Retrieved from <http://lup.lub.lu.se/record/4216141>
- Hong, J. H., Chiew, Y. M., Lu, J. Y., Lai, J. S., & Lin, Y. B. (2012). Houfeng bridge failure in Taiwan. *Journal of Hydraulic Engineering*, 138(2), 186–198.
- Houghton, H. G., & Radford, W. H. (1938). On the measurement of drop size and liquid water content in fogs and clouds. *Pap. Phys. Oceanogr. Meteor.*, 6(4), 31pp.
- Hudson, L. (2004). *Highways asset management case study, UKCIP costing method case study*. Oxford, UK: UK Climate Impacts Programme.
- Hultén, C., Andersson-Sköld, Y., Ottosson, E., Edstam, T., & Johansson, Å. (2007, May). Case studies of landslide risk due to climate change in Sweden. In R. McInnes, J. Jakeways, H. Fairbank, & E. Mathie (Eds.). *Landslides and Climate Change: Challenges and Solutions, Proceedings of the International Conference on Landslides and Climate Change* (pp. 149–157). London, UK: Taylor & Francis.
- Imada, Y., Maeda, S., Watanabe, M., Shiogama, H., Mizuta, R., Ishii, M., & Kimoto, M. (2017). Recent enhanced seasonal temperature contrast in Japan from large ensemble high-resolution climate simulations. *Atmosphere*, 8(57), atmos8030057.
- IPCC (Intergovernmental Panel on Climate Change). (2012). *Managing the risks of extreme events and disasters to advance climate change adaptation. A special report of working groups I and II of the intergovernmental panel on climate change*. Cambridge & New York: Cambridge University Press.
- IPCC (Intergovernmental Panel on Climate Change). (2013). *Climate Change 2013: The Physical Science Basis- Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change*. Cambridge & New York: Cambridge University Press.
- IPCC (Intergovernmental Panel on Climate Change). (2014). *Climate Change 2014-Impacts, Adaptation, and Vulnerability-Part A: Global and Sectoral Aspects-Working Group II Contribution to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change*. Cambridge & New York: Cambridge University Press.
- IPCC (Intergovernmental Panel on Climate Change). (2018). Summary for Policymakers. In: *Global warming of 1.5°C. An IPCC special report on the impacts of global warming of 1.5°C above pre-industrial levels and related global greenhouse gas emission pathways, in the context of strengthening the global response to the threat of climate change, sustainable development, and efforts to eradicate poverty* V. Masson-Delmotte, P. Zhai, H. O. Pörtner, D. Roberts, J. Skea, P. R. Shukla, A. Pirani, W. Moufouma-Okia, C. Péan, R. Pidcock, S. Connors, J. B. R. Matthews, Y. Chen, X. Zhou, M. I. Gomis, E. Lonnoy, T. Maycock, M. Tignor, T. Waterfield (eds.). World Meteorological Organization, Geneva, Switzerland, 32 pp.
- Jeong, H., Kim, H., Kim, K., & Kim, H. (2017). Prediction of flexible pavement deterioration in relation to climate change using fuzzy logic. *Journal of Infrastructure Systems*, 23(4), 04017008.
- Jevrejeva, S., Jackson, L. P., Grinsted, A., Lincke, D., & Marzeion, B. (2018). Flood damage costs under the sea level rise with warming of 1.5 °C and 2 °C. *Environmental Research Letters*, 13(2018), 074014.
- Kallias, A. N., & Imam, B. (2016). Probabilistic assessment of local scour in bridge piers under changing environmental conditions. *Structure and Infrastructure Engineering*, 12(9), 1228–1241.
- Kaplan, S. (1997). The words of risk analysis. *Risk Analysis*, 17(4), 407–417.
- Kaplan, S., Haimes, Y. Y., & Garrick, B. J. (2001). Fitting hierarchical holographic modeling into the theory of scenario structuring and a resulting refinement to the quantitative definition of risk. *Risk Analysis*, 21(5), 807–819.
- Karl, T. R., Melillo, J. M., & Peterson, T. C. (Eds.). (2009). *Global climate change impacts in the United States*. Cambridge & New York: Cambridge University Press.
- Kattell, J., & Eriksson, M. (1998). *Bridge scour evaluation: Screening, analysis, & countermeasures*. Washington, DC: Forest Service, USDA.

- Kawai, H., Koshiro, T., Endo, H., Arakawa, O., & Hagihara, Y. (2016). Changes in marine fog in a warmer climate. *Atmospheric Science Letters*, 17, 548–555.
- Kean, J. W., Staley, D. M., & Cannon, S. H. (2011). In situ measurements of post-fire debris flows in southern California: Comparisons of the timing and magnitude of 24 debris-flow events with rainfall and soil moisture conditions. *Journal of Geophysical Research*, 116, F04019.
- Kelly, A. J., Sauer, E. K., Christiansen, E. A., Barbour, S. L., & Widger, R. A. (1995). Deformation of the deer creek bridge by an active landslide in clay shale. *Canadian Geotechnical Journal*, 32, 701–724.
- Kerr, G. H., DeGaetano, A. T., Stoof, C. R., & Ward, D. (2018). Climate change effects on wildland fire risk in the Northeastern and great lakes states predicted by a downscaled multi-model ensemble. *Theoretical and Applied Climatology*, 131, 625–639.
- Klaassen, R. K. W. M. (2015, September). *Life expectation of wooden foundations - a non-destructive approach. Paper presented at the international symposium non-destructive testing in civil engineering*, Berlin.
- Kleissl, K., & Georgakis, C. (2010, May). *Bridge ice accretion and de- and anti-icing systems: A review. Paper presented at the 7th international cable supported bridge operators' conference (7th ICSBOC)*, Zhenjiang, China.
- Köliö, A., Pakkala, T. A., Lahdensivu, J., & Kiviste, M. (2014). Durability demands related to carbonation induced corrosion for finnish concrete buildings in changing climate. *Engineering Structures*, 62, 42–52.
- Komori, D., Rangsiwanichpong, P., Inoue, N., Ono, K., Watanabe, S., & Kazama, S. (2018). Distributed probability of slope failure in Thailand under climate change. *Climate Risk Management*, 20(2018), 126–137.
- Kristo, C., Rahardjo, H., & Satyanaga, A. (2017). Effect of variations in rainfall intensity on slope stability in Singapore. *International Soil and Water Conservation Research*, 5, 258–264.
- Kumar, P., & Imam, B. (2013). Footprints of air pollution and changing environment on the sustainability of built infrastructure. *Science of the Total Environment*, 444, 85–101.
- Kumlai, S., Jitsangiam, P., & Pichayapan, P. (2017). The implications of increasing temperature due to climate change for asphalt concrete performance and pavement design. *KSCE Journal of Civil Engineering*, 21(4), 1222–1234.
- Lichtenstein, A. G. (1993). The silver bridge collapse recounted. *Journal of Performance of Constructed Facilities*, 7(4), 249–261.
- Lozano, O. M., Salis, M., Ager, A. A., Arca, B., Alcasena, F. J., Monteiro, A. T., ... Spano, D. (2017). Assessing climate change impacts on wildfire exposure in Mediterranean areas. *Risk Analysis*, 37(10), 1898–1916.
- Mallick, D. V., Tawil, M. M., & Shibani, A. A. (1989). Durability of foundation concrete in an aggressive environment. *IABSE Reports, IABSE Symposium (Lisbon): Durability of Structures*, 57(1), 243–248.
- Mallick, R. B., Jacobs, J. M., Miller, B. J., Daniel, J. S., & Kirshen, P. (2018). Understanding the impact of climate change on pavements with CMIP5, system dynamics and simulation. *International Journal of Pavement Engineering*, 19(8), 697–705.
- Margreth, S., & Ammann, W. J. (2004). Hazard scenarios for avalanche actions on bridges. *Annals of Glaciology*, 38, 89–96.
- Mårtensson, A. (1994). Mechano-sorptive effects in wooden material. *Wood Science and Technology*, 28, 437–449.
- Mayer, M. (1926). *Die Sicherheit der Bauwerke und ihre Berechnung nach Grenzkraften instate nach Zulässigen Spannungen* [The safety of constructional works and its design according to limit states instead of permissible stresses] (Unpublished doctoral dissertation). Springer Verlag, Berlin. (English and Spanish translations published by ANATOMIC, Madrid, 1975).
- McGuire, B. (2012). *Waking the Giant: How a changing climate triggers earthquakes, tsunamis, and volcanos*. Oxford: Oxford University Press.
- McInnes, K. L., Walsh, K. J. E., Hubbert, G. D., & Beer, T. (2003). Impact of sea-level rise and storm surges on a coastal community. *Natural Hazards*, 30(2), 187–207.
- McKenzie, R. L., Aucamp, P. J., Bais, A. F., Björn, L. O., Ilyas, M., & Madronich, S. (2011). Ozone depletion and climate change: Impacts on UV radiation. *Photochemical and Photobiological Sciences*, 10, 182–198.
- Meyer, M. (2008). *Design standards for U.S. transportation infrastructure: The implications of climate change*. (Special Rep. 290). Washington, DC: Transportation Research Board. <http://onlinepubs.trb.org/onlinepubs/sr/sr290Meyer.pdf>
- Meyer, M., & Weigel, B. (2011). Climate change and transportation engineering: Preparing for a sustainable future. *Journal of Transportation Engineering*, 137(6), 393–403.
- Mideksa, T. K., & Kallbekken, S. (2010). The impact of climate change on the electricity market: A review. *Energy Policy*, 38, 3579–3585.
- Moncmanová, A. (2007). Environmental factors that influence the deterioration of materials. *WIT Transactions on State of the Art in Science and Engineering*, 28, 1–25.
- Mondoro, A., Frangopol, D. M., & Liu, L. (2018). Bridge adaptation and management under climate change uncertainties: A review. *Natural Hazards Review*, 19(1), 04017023.
- Moody, J. A., & Martin, D. A. (2001). Post-fire, rainfall intensity-peak discharge relations for three mountainous watersheds in the western USA. *Hydrological Processes*, 15, 2981–2993.
- Mudd, L., Wang, Y., Letchford, C., & Rosowsky, D. (2014a). Assessing climate change impact on the U.S. East coast hurricane hazard: Temperature, frequency, and track. *Natural Hazards Review*, 15(3), 04014001.
- Mudd, L., Wang, Y., Letchford, C., & Rosowsky, D. (2014b). Hurricane wind hazard assessment for a rapidly warming climate scenario. *Journal of Wind Engineering and Industrial Aerodynamics*, 133, 242–249.
- Nasser, K. M., & Neville, A. M. (1967). Creep of old concrete at normal and elevated temperatures. *ACI JOURNAL Proceedings*, 64(2), 97–103.
- Nath, S. K., Adhikari, M. D., Maiti, S. K., Devaraj, N., Srivastava, N., & Mohapatra, L. D. (2014). Earthquake scenario in West Bengal with emphasis on seismic hazard microzonation of the city of Kolkata, India. *Natural Hazards and Earth System Sciences*, 14, 2549–2575.
- Nath, S. K., Srivastava, N., Ghatak, C., Adhikari, M. D., Ghosh, A., & Ray, S. P. S. (2018). Earthquake induced liquefaction hazard, probability and risk assessment in

- the city of Kolkata, India: Its historical perspective and deterministic scenario. *Journal of Seismology*, 22, 35–68.
- Neary, D. G., Gottfried, G. J., & Ffolliott, P. F. (2003, November). *Post-wildfire watershed flood responses. In the second international fire ecology and fire management congress*. (paper 1B7). Orlando, Florida.
- Neil, C. R. (1964). *River bed scour, a review for bridge engineers*. (Contract No. 281). Calgary, Alta., Canada: Research Council of Alberta.
- Nikitas, N. (2011). *Wind-induced dynamic instabilities of flexible bridges* (Doctoral dissertation). Retrieved from https://www.researchgate.net/profile/Nikolaos_Nikitas2/publication/292976045_Wind-Induced_Dynamic_Instabilities_of_Flexible_Bridges/links/56b325c108ae56d7b06d637e.pdf
- Novak, P., Moffat, A., Nalluri, C., & Narayanan, R. (2014). *Hydraulic structures*. NY: Taylor & Francis.
- Obermeier, S. F. (1996). Use of liquefaction-induced features for paleoseismic analysis—an overview of how seismic liquefaction features can be distinguished from other features and how their regional distribution and properties of source sediment can be used to infer the location and strength of holocene paleo-earthquakes. *Engineering Geology*, 44(1), 1–76.
- Ohunakin, O. S., Adaramola, M. S., Oyewola, O. M., Matthew, O. J., & Fagbenle, R. O. (2015). The effect of climate change on solar radiation in Nigeria. *Solar Energy*, 116, 272–286.
- Olofsson, M. (2007). *Climate change and urban drainage-future precipitation and hydraulic impact* (Licentiate thesis). Retrieved from <https://www.diva-portal.org/smash/get/diva2:989804/FULLTEXT01.pdf>
- Padgett, J., DesRoches, R., Nielson, B., Yashinsky, M., Kwon, O., Burdette, N., & Tavera, E. (2008). Bridge damage and repair costs from Hurricane Katrina. *Journal of Bridge Engineering*, 13(1), 6–14.
- Pakkala, T. A., Köliö, A., Lahdensivu, J., & Pentti, M. (2015). The effect of climate change on freeze-thaw cycles in Nordic climate. In C. Andrade, J. Gulikers, & R. Polder (Eds.), *Durab. reinf. concr. from composition to prot. selected papers of the 6th international RILEM PhD workshop* (pp. 145–154). Cham: Springer International Publishing.
- Petermann, T., Bradke, H., Lüllmann, A., Poetzsch, M., & Riehm, U. (2011). *What happens during a blackout: Consequences of a prolonged and wide-ranging power outage. Technology assessment studies series – 4*. Berlin: Office of Technology Assessment at the German Bundestag.
- Prowse, T., Alfredsen, K., Beltaos, S., Bonsal, B., Duguay, C., Korhola, A., ... Weyhenmeyer, G. (2011). Changing lake and river ice regimes: Trends, effects and implications. In AMAP (Ed.), *Snow, water, ice and permafrost in the arctic (SWIPA) (Chapter 6)*. Oslo: Arctic Monitoring and Assessment Programme (AMAP).
- Qiao, Y. (2015). *Flexible pavements and climate change: Impact of climate change on the performance, maintenance, and life-cycle costs of flexible pavements* (Doctoral dissertation). Retrieved from <http://eprints.nottingham.ac.uk/29582/1/Thesis%20%28V15%29.pdf>
- Qu, W., Wang, J., Zhang, X., Yang, Z., & Gao, S. (2015). Effect of cold wave on winter visibility over eastern China. *Journal of Geophysical Research: Atmospheres*, 120, 2394–2406.
- Raspotnig, C., & Opdahl, A. (2013). Comparing risk identification techniques for safety and security requirements. *The Journal of Systems and Software*, 86, 1124–1151.
- Razak, H. A. (1986). *Time dependent effects in reinforced concrete sections subjected to flexure* (Doctoral dissertation). Retrieved from <http://epubs.surrey.ac.uk/1003/1/fulltext.pdf>
- Riahi, K., Rao, S., Krey, V., Cho, C., Chirkov, V., Fischer, G., ... Rafaj, P. (2011). RCP 8.5—A scenario of comparatively high greenhouse gas emissions. *Climatic Change*, 109, 33–57.
- Robinson, J. D., Vahedifard, F., & AghaKouchak, A. (2017). Rainfall-triggered slope instabilities under a changing climate: Comparative study using historical and projected precipitation extremes. *Canadian Geotechnical Journal*, 54, 117–127.
- Rogelj, J., Den Elzen, M., Höhne, N., Fransen, T., Fekete, H., Winkler, H., ... Meinshausen, M. (2016). Paris agreement climate proposals need a boost to keep warming well below 2°C. *Nature*, 534, 631–639.
- Rosowsky, D. V. (2018). Assessing climate change impacts on hurricane hazards. In C. Murphy, P. Gardoni, & R. McKim (Eds.), *Climate change and its impacts, climate change management* (pp. 93–107). Cham: Springer.
- RSSB (Rail Safety and Standards Board). (2003). *Rail safety and standards board, safety implications of weather, climate and climate change: Final report* (Report No. AEAT/RAIR/76148/R03/005). Cheshire, UK: Rail Safety and Standards Board.
- Rupnow, T. (2010). *Evaluation of the LA 1 bridge at the morganza flood control structure* (Report No. FHWA/LA.10/11-1TA). Baton Rouge, LA: Louisiana Transportation Research Center.
- Ryan, P. C., Stewart, M. G., Spencer, N., & Li, Y. (2016). Probabilistic analysis of climate change impacts on timber power pole networks. *Electrical Power and Energy Systems*, 78, 513–523.
- Salman, A. M., Li, Y., & Bastidas-Arteaga, E. (2017). Maintenance optimization for power distribution systems subjected to hurricane hazard, timber decay and climate change. *Reliability Engineering & System Safety*, 168, 136–149.
- Sanders, C. H., & Phillipson, M. C. (2003). UK adaptation strategy and technical measures: The impacts of climate change on buildings. *Building Research and Information*, 31(3), 210–221.
- Schwartz, H. G. (2010). Adaptation to the impacts of climate change on transportation. *The Bridge*, 40(3), 5–13.
- Seo, D. W., & Caracoglia, L. (2015). Exploring the impact of “climate change” on lifetime replacement costs for long-span bridges prone to torsional flutter. *Journal of Wind Engineering and Industrial Aerodynamics*, 140, 1–9.
- Shakesby, R. A., & Doerr, S. H. (2006). Wildfire as a hydrological and geomorphological agent. *Earth-Science Reviews*, 74, 269–307.
- Shen, H. W., Schneider, V. R., & Karaki, S. (1969). Local scour around bridge piers. *Proceedings ASCE*, 95(6), 1919–1940.
- Shupe, T., Lebow, S., & Ring, D. (2008). *Causes and control of wood decay, degradation and stain*. (Pub.2703). Baton Rouge, LA: Louisiana Cooperative Extension Service.
- Soares, P. M. M., Lima, D. C. A., Cardoso, R. M., Nascimento, M. L., & Semedo, A. (2017). Western

- Iberian offshore wind resources. *More or Less in a Global Warming Climate? Applied Energy*, 203, 72–90.
- Song, H., & Lee, S. (2017). Effects of wind and tree density on forest fire patterns in a mixed-tree species forest. *Forest Science and Technology*, 13(1), 9–16.
- Stambaugh, M. C., Guyette, R. P., Stroh, E. D., Struckhoff, M. A., & Whittier, J. B. (2018). Future south-central US wildfire probability due to climate change. *Climate Change*, 147, 617–631.
- Stein, S. M., & Sedmera, K. (2006). *Risk-based management guidelines for scour at bridges with unknown foundations* (Rep. No. 107). Washington, DC: NCHRP.
- Stein, S. M., Young, G. K., Trent, R. E., & Pearson, D. R. (1999). Prioritizing scour vulnerable bridges using risk. *Journal of Infrastructure Systems*, 5(3), 95–101.
- Stewart, M. G., Wang, X., & Nguyen, M. N. (2011). Climate change impact and risks of concrete infrastructure deterioration. *Journal of Engineering Structures*, 33, 1326–1337.
- Stoffel, M., & Huggel, C. (2012). Effects of climate change on mass movements in mountain environments. *Progress in Physical Geography: Earth and Environment*, 36, 421–439.
- Stoffel, M., Tiranti, D., & Huggel, C. (2014). Climate change impacts on mass movements - case studies from the European Alps. *Science of the Total Environment*, 493, 1255–1266.
- Strydom, S., & Savage, M. J. (2017). Potential impacts of climate change on wildfire dynamics in the midlands of KwaZulu-Natal, South Africa. *Climate Change*, 143, 385–397.
- Taricska, M. R. (2014). *An analysis of recent bridge failures in the United States (2000–2012)* (Master's thesis). Retrieved from https://etd.ohiolink.edu/!etd.send_file?accession=osu1397600086&disposition=inline
- Titus, J. G., & Richman, C. (2001). Maps of lands vulnerable to sea-level rise: Modeled elevation along the US Atlantic and gulf coasts. *Climate Research*, 18, 205–228.
- Toll, D. G., Abedin, Z., Buma, J., Cui, Y., Osman, A. S., & Phoon, K. K. (2012). *The impact of changes in the water table and soil moisture on structural stability of buildings and foundation systems: systematic review* (CEE10-005 (SR90)) (Technical report-collaboration for environmental evidence). Durham: Durham University Library.
- Torroja, E., & Paez, A. (1949). La Determinacion del Coeficiente de Seguridad en las Distintas Obras. Madrid, Spain: Instituto Tecnico de la Construcción e del Cemento.
- TRB (Transportation Research Board). (2008). *Potential impacts of climate change on U.S. Transportation* (Special Report 290). Washington D.C: Committee on Climate Change and U.S. Transportation, Transportation Research Board, National Research Council.
- Úbeda, B., Di Giacomo, A. S., Neiff, J. J., Loiselle, S. A., Poi, A. S. G., Gálvez, J. Á., ... Cózar, A. (2013). Potential effects of climate change on the water level, flora and macro-fauna of a large neotropical wetland. *PloS one*, 8(7), e67787.
- UNFCCC (United Nations Framework Convention on Climate Change). (2015). *Adoption of the Paris agreement* (Report No. FCCC/CP/2015/L.9/Rev.1). Conference of the Parties, twenty-first session. Paris: United Nations Framework Convention on Climate Change. <http://unfccc.int/resource/docs/2015/cop21/eng/l09r01.pdf>
- Usman, M. (2016). A study on the enhancing earthquake frequency in northern Pakistan: Is the climate change responsible? *Natural Hazards*, 82, 921–931.
- Van Den Hurk, B., Van Meijgaard, E., De Valk, P., Van Heeringen, K. J., & Gooijer, J. (2015). Analysis of a compounding surge and precipitation event in the Netherlands. *Environmental Research Letters*, 10, 035001.
- Van Vuuren, D. P., Edmonds, J., Kainuma, M., Riahi, K., Thomson, A., Hibbard, K., ... Rose, S. K. (2011). Representative concentration pathways: An overview. *Climate Change*, 109, 5–31.
- Vandamme, M., Zhang, Q., Ulm, F., Roy, R. L., Zuber, B., Gartner, E., & Termkhajornkit, P. (2013, September). Creep properties of cementitious materials from indentation testing: Significance, influence of relative humidity, and analogy between C–S–H and soils. In F. Ulm, H. M. Jennings, & R. Pellenq (Eds.), *Proceedings of the ninth international conference on creep, shrinkage, and durability mechanics (CONCREEP-9)* 48–61. Virginia: ASCE.
- Wang, X., Stewart, M. G., & Nguyen, M. N. (2012). Impact of climate change on corrosion and damage to concrete infrastructure in Australia. *Climatic Change*, 110(3–4), 941–957.
- Willway, T., Baldachin, L., Reeves, S., Harding, M., McHale, M., & Nunn, M. (2008). *The effects of climate change on highway pavements and how to minimize them: Technical report* (PPR184). Berkshire, UK: TRL Limited.
- Woodworth, M. A. (2013). *Fire hazard assessment for highway bridges with thermal mechanical modeling* (Doctoral dissertation). Retrieved from https://vtechworks.lib.vt.edu/bitstream/handle/10919/23683/Woodworth_MA_D_2013.pdf?sequence=1&isAllowed=y
- Wu, D., Deng, X., Mao, J., Mao, W., Ye, Y., & Bi, X. (2007). Macro- and microstructures of heavy fogs and visibility in the Dayaoshan expressway. *Acta Meteorologica Sinica*, 21, 342–352.
- Wu, S. Y., Najjar, R., & Siewert, J. (2009). Potential impacts of sea-level rise on the mid- and upper-Atlantic region of the United States. *Climatic Change*, 95(1–2), 121–138.
- Wu, T., Shih, H. J., Li, H. C., Su, Y. F., & Chen, Y. M. (2016). Landslide impact assessment using projection rainfall data from climate change scenario. *Terrestrial, Atmospheric and Oceanic Sciences*, 27(5), 729–740.
- Wu, T. H., McKinnell, W. P., III, & Swanston, D. N. (1979). Strength of tree roots and landslides on prince of Wales Island, Alaska. *Canadian Geotechnical Journal*, 16, 19–33.
- Wuttrich, R., Wekezer, J., Yazdani, N., & Wilson, C. (2001). Performance evaluation of existing bridge fenders for ship impact. *Journal of Performance of Constructed Facilities*, 15(1), 17–23.
- Yilmaz, I., & Bagci, A. (2006). Soil liquefaction susceptibility and hazard mapping in the residential area of Kütahya (Turkey). *Environmental Geology*, 49, 708–719.
- Youd, T. L. (1993). Liquefaction-induced damage to bridges. *Transportation Research Record*, 1411, 35–41.
- Zevenbergen, L. W., Arneson, L. A., Hunt, J. H., & Miller, A. C. (2012). *Hydraulic design of safe bridges* (Report No. FHWA-HIF-12-018HDS 7). Fort Collins, CO: Ayres Associates.
- Zia, P., Preston, H. K., Scott, N. L., & Workman, E. B. (1979). Estimating prestress losses. *Concrete International*, 1(6), 32–38.